

THREAD MAKING



Tool Selection Guide

C4C8

Guide to Icons



➤ T-THREAD
Holder Page



➤ Cutting Condition Page







T-THREAD (Thread Turning)

Holder Designation System	C10
External Toolholders	C11
Internal Toolholders	C13
Insert Designation System	C18
Inserts	C19
Recommended Cutting Conditions	C52
Technical Data	C54

Tool Selection Guide

Threading inserts

Thread		T-THREAD			
		55° thread	60° thread	Metric ISO	American UN
					
Pages		C19	C20	C21 - C25	C26 - C30
Pitch		thread / inch	mm (thread / inch)	mm	thread / inch
Application		General use for 55° thread forms for wide range of pitches	General use for 60° thread forms for wide range of pitches	General usage for all industries	General usage for all industries
 M - type	ER	●	●	●	●
	IR	●	●	●	●
 Regular type	ER/IR	●	●	●	●
	EL/IL	●	●	●	●
 B - type	ER	●	●	●	●
	IR	●	●	●	●
 U - type	IRL	●	●	●	●
	EIRL	●	●		
	ERL			●	
 Multi-tooth type	ER			●	●
	IR			●	●

ER: External right hand

EIRL: External right / left hand

EL: External left hand

IRL: Internal Right / left hand

IR: Internal right hand

EIRL: External / internal right / left hand

IL: Internal left hand





Tool Selection Guide

Threading inserts

T-THREAD					
Whitworth	NPT	NPTF	BSPT	STUB ACME	ACME
C31 - C34	C35 - C36	C37	C38	C39	C40
thread / inch	thread / inch	thread / inch	thread / inch	thread / inch	thread / inch
General industries. Pipe fittings and couplings	Steam, gas and water pipes	Steam, gas and water pipes. Dry seal	55° form for steam, gas and water pipes	Shallow ACME profile for motion transmission	Motion transmission. Feed screws
•	•		•		
•	•		•		
•	•	•	•	•	•
•	•		•	•	•
•	•		•		
•	•		•		
					•
					•
•	•				
•	•				

Tool Selection Guide

Threading inserts

Thread		T-THREAD			
		UNJ	MJ	Trapez DIN 103	Sagengengewinde DIN 513
					
Pages		C41 - C42	C43	C44	C46
Pitch		thread / inch	mm	mm	mm
Application		Aviation and aerospace industry	Aviation and aerospace industry	Motion transmission. Feed screws	For high force in one direction
 M - type	ER				
	IR				
 Regular type	ER/IR	•	•	•	•
	EL/IL	•		•	•
 B - type	ER				
	IR	•			
 U - type	ER/IR				•
	EL/IL				•
	ERL/IRL			•	
 Multi-tooth type	ER				
	IR				

ER: External right hand

ERL: External right / left hand

EL: External left hand

IRL: Internal Right / left hand







IR: Internal right hand

EIRL: External / internal right / left hand

IL: Internal left hand

Tool Selection Guide

Threading inserts

T-THREAD					
American buttress	Round DIN 405	API round	API	Buttress casing	Extreme line casing
					
C47	C48	C49 - C50	C50	C51	C51
thread / inch	thread / inch	thread / inch	thread / inch	thread / inch	thread / inch
For high force in one direction	Pipe coupling in fire fighting, chemical and food industries	60° thread with large radius in the oil and gas industry	60° thread form for pipe connections in the oil and gas industry	Tube and casings in the oil and gas industry	Tube and casings in the oil and gas industry
	●				
	●				
●	●	●	●	●	●
●	●	●	●		
●					

Grades

Thread making grades

Grades	ISO	Characteristics & applications
TT7010 PVD coated	P05 P25 K05 K25	• General machining of steel and cast iron
TT8010 PVD coated	P30 P50 M30 M50 S30 S50	• Toughest grade in threading product line • For a wide range of threading on low carbon steel & low carbon alloy steel • Medium to low speed threading of stainless steel and exotic materials
TT9030 PVD coated	P20 P40 M20 M40 S20 S40	• General machining of steel • General machining of stainless steel • General machining of heat-resistant alloy
P30 Carbide	P25 P35	• General machining of steel

T-THREAD

Thread Turning



S

E

R

2020

K

16

1

2

3

4

5

6

7

1 Clamping system


S - Screw clamping

2 Application

E - External
I - Internal

3 Hand of tool

R - Right-hand
L - Left-hand



4 Shank size

External toolholders
Shank: HxB


2020: 20x20 mm

Internal toolholders
Neck diameter

0025: Neck diameter 25 mm


5 Tool length

	mm
D	- 60
F	- 80
H	- 100
K	- 125
L	- 140
M	- 150
P	- 170
R	- 200
S	- 250
T	- 300
U	- 350
V	- 400



6 Insert size


INSL (mm)	IC
06	3.97 mm = 5/32"
08	4.76 mm = 3/16"
08U	4.76 mm = 3/16"
11	6.35 mm = 1/4"
16	9.52 mm = 3/8"
22	12.70 mm = 1/2"
22U	12.70 mm = 1/2"
27	15.88 mm = 5/8"
27U	15.88 mm = 5/8"



7 Optional specifications

U - For U-type inserts
B - Bore for coolant
C - Carbide shank
D - Drop head
G - Gang tool
AD - Short type
SP - Special

External threading toolholders

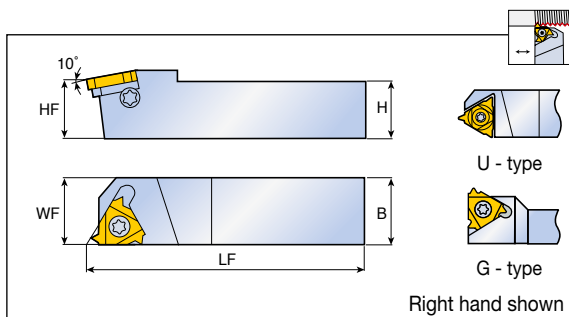

Designation		Dimension (mm)					Insert ⁽²⁾
		H	HF	B	LF	WF	
SER	0808 H11 ⁽¹⁾	8	8	8	100	11	11 ER...
	1616 K16G	16	16	16	125	21.7	16 ER...
	4040 R27	40	40	40	200	40	27 ER...
SER/L	1010 H11 ⁽¹⁾	10	10	10	100	11	11 ER/L...
	1212 F16	12	12	12	80	16	16 ER/L...
	1212 X16	12	12	12	120	12	16 ER/L...
	1616 H16	16	16	16	100	16	16 ER/L...
	2020-16-AD	20	20	20	67	25	16 ER/L...
	2020 K16	20	20	20	125	20	16 ER/L...
	2525 M16	25	25	25	150	25	16 ER/L...
	3232 P16	32	32	32	170	32	16 ER/L...
	2525 M22	25	25	25	150	25	22 ER/L...
	3232 P22	32	32	32	170	32	22 ER/L...
	4040 R22	40	40	40	200	40	22 ER/L...
	2525 M22U	25	25	25	150	28	22 UERL...
	3232 P22U	32	32	32	170	32	22 UERL...
	4040 R22U	40	40	40	200	40	22 UERL...
	2525 M27	25	25	25	150	25	27 ER/L...
	3232 P27	32	32	32	170	32	27 ER/L...
	2525 M27U	25	25	25	150	32	27 UERL...
	3232 P27U	32	32	32	170	32	27 UERL...
	4040 R27U	40	40	40	200	40	27 UERL...

► ⁽¹⁾ Toolholders without anvil ► ⁽²⁾ Right hand inserts (ER) for right hand tools (SER)


► All Toolholders are made with 1.5° helix angle

► For multi-tooth inserts use anvils AE16M, AE22M, AE27M

Spare parts

Designation	Insert screw	Anvil screw	Anvil ext. right	Anvil ext. left	Torx wrench	
SER/L...11						
SER...16	S16	A16	AE16		T-10/5	
SEL...16	S16	A16		AI16	T-10/5	
SER...22(22U)	S22	A22	AE22(AE22U)		T-20/5	
SEL...22(22U)	S22	A22		AI22(AI22U)	T-20/5	
SER...27(27U)	TS40	A27	AE27(AE27U)		TK40	
SEL...27(27U)	TS40	A27		AI27(AI27U)	TK40	


A diagram showing a cross-section of a mechanical assembly. A yellow starburst is located at the interface between a grey component and a blue component. A red wavy line is drawn along the top surface of the blue component. A double-headed arrow is shown below the grey component, indicating a horizontal movement or adjustment.

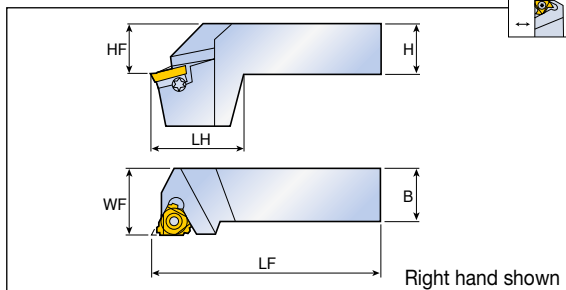[illegible]

- ▶ All Toolholders are made with 1.5° helix angle
- ▶ For multi-tooth inserts use anvils AE16M, AE22M, AE27M


Designation	Insert screw	Anvil screw	Anvil ext. right	Anvil ext. left	Torx wrench	
SER...16	S16	A16	AE16		T-10/5	
SEL...16	S16	A16		AI16	T-10/5	
SER...22	S22	A22	AE22		T-20/5	
SEL...22	S22	A22		AI22	T-20/5	

Internal threading toolholders

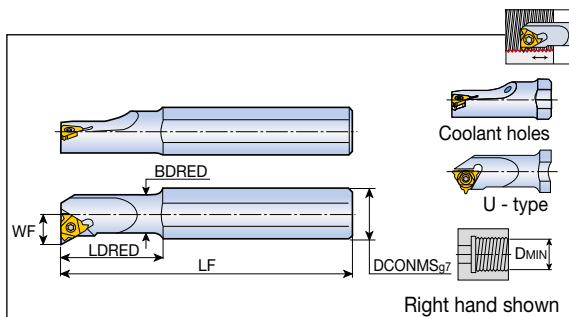

Designation	Dimension (mm)						Coolant hole	Insert ⁽²⁾
	DCONMS	BDRED	LF	LDRED	DMIN	WF		
SIR/L 0005 H06 ⁽¹⁾	12	5.1	100	12	6.4	4.3	x	06 IR/L...
0007 K08 ⁽¹⁾	16	6.6	125	18	9.0	5.3	x	08 IR/L...
0008 K08U ⁽¹⁾	16	7.4	125	21	9.0	6.4	x	08 UIRL...
0010 H11 ⁽¹⁾	10	10	100	-	12	7.4	x	11 IR/L...
SIR 0010 H11B ⁽¹⁾	10	10	100	-	12	7.4	●	11 IR...
SIR/L 0010 K11 ⁽¹⁾	16	10	125	25	12	6.5	x	11 IR/L...
0010 K11B ⁽¹⁾	16	10	125	25	12	7.4	●	11 IR/L...
0013 L11 ⁽¹⁾	16	13	140	32	15	8.9	x	11 IR/L...
0013 M16 ⁽¹⁾	16	13	150	32	16	10.0	x	16 IR/L...
0013 M16B ⁽¹⁾	16	13	150	32	16	10.2	●	16 IR/L...
0016 P16 ⁽¹⁾	20	16	170	40	19	11.4	x	16 IR/L...
0016 P16B ⁽¹⁾	20	16	170	40	19	11.7	●	16 IR/L...
0020-16-AD	20	20	80	-	24	13.7	x	16 IR/L...
0020 P16	20	20	170	-	24	13.4	x	16 IR/L...
0020 P16B	20	20	170	-	24	13.7	●	16 IR/L...
0025-16-AD	25	25	120	-	29	16.3	x	16 IR/L...
0025 R16	25	25	200	-	29	16.3	x	16 IR/L...
0025 R16B	25	25	200	-	29	16.2	●	16 IR/L...
0032 S16	32	32	250	-	36	19.6	x	16 IR/L...
0040 T16	40	40	300	-	44	23.8	x	16 IR/L...
0050 U16	50	50	350	-	54	28.7	x	16 IR/L...
0020 P22 ⁽¹⁾	20	20	170	-	24	15.6	x	22 IR/L...
0025 R22	25	25	200	-	29	17.2	x	22 IR/L...
0025 R22B	25	25	200	-	29	18.1	●	22 IR/L...
0032 S22	32	32	250	-	38	21.5	x	22 IR/L...
0040 T22	40	40	300	-	46	25.8	x	22 IR/L...
0050 U22	50	50	350	-	56	30.6	x	22 IR/L...
0032 S22U	32	32	250	-	38	25.5	x	22 UIRL...
0040 T22U	40	40	300	-	46	29.5	x	22 UIRL...
0032 S27	32	32	250	-	40	22.4	x	27 IR/L...
0040 T27	40	40	300	-	48	26.4	x	27 IR/L...
0050 U27	50	50	350	-	58	31.4	x	27 IR/L...
0060 V27	60	60	400	-	68	36.4	x	27 IR/L...


- ▶ ⁽¹⁾ Toolholders without anvil
- ▶ ⁽²⁾ Right hand inserts (IR) for right hand tools (SIR)
- ▶ For multi-tooth inserts use anvils AI16M, AI22M, AI27M
- ▶ All Toolholders are made with 1.5° helix angle

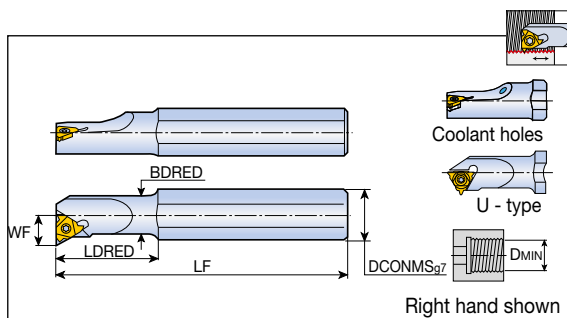

- ▶ ⁽²⁾ Right hand inserts (IR) for right hand tools (SIR)
- ▶ For multi-tooth inserts use anvils AI16M, AI22M, AI27M
- ▶ All Toolholders are made with 1.5° helix angle

Designation	Insert screw	Anvil screw	Anvil int. left	Anvil int. right	Torx wrench	
SIR/L...06	TS 20038I				T-6/5	
SIR/L...08	TS 20054I				T-6/5	
SIR/L...11	S11				T-8/5	
SIR/L 0013...16	S16S				T-10/5	
SIR/L 0016...16	S16S				T-10/5	
SIR...16	S16	A16		AI16	T-10/5	
SIL...16	S16	A16	AE16		T-10/5	
SIR/L 0020...22	S22S				T-20/5	
SIR...22	S22	A22		AI22	T-20/5	
SIR...22U	S22	A22		AI22U	T-20/5	
SIL...22	S22	A22	AE22		T-20/5	
SIL...22U	S22	A22	AE22U		T-20/5	
SIR...27	TS40	A27		AI27	TK40	
SIR...27U	TS40	A27		AI27U	TK40	
SIL...27	TS40	A27	AE27		TK40	
SIL...27U	TS40	A27	AE27U		TK40	


T-THREAD

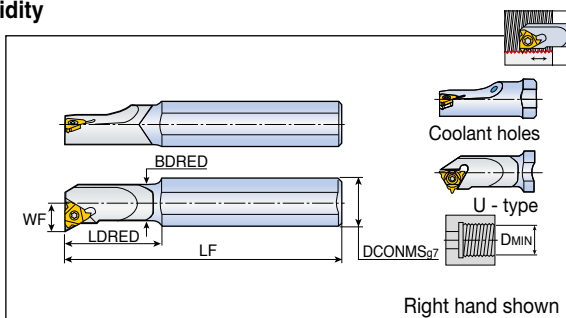[illegible]

- ▶ ⁽¹⁾ Toolholders without anvil
- ▶ ⁽²⁾ Right hand inserts (IR) for right hand tools (SIR)
- ▶ For multi-tooth inserts use anvils AI16M, AI22M, AI27M
- ▶ All carbide shank Toolholders are coolant through type
- ▶ All Toolholders are made with 1.5° helix angle

Designation	Insert screw	Anvil screw	Anvil int. left	Anvil int. right	Torx wrench	
SIR/L...06	TS 20038I				T-6/5	
SIR/L...08	TS 20054I				T-6/5	
SIR/L...11	S11				T-8/5	
SIR/L 0016...16	S16S				T-10/5	
SIR...16	S16	A16		AI16	T-10/5	
SIL...16	S16	A16	AE16		T-10/5	

Sleeve holders for external threading

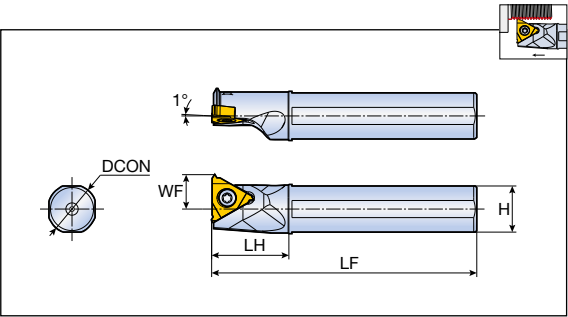

Designation	Dimension (mm)					Insert
	DCON	H	LF	LH	WF	
TMS- 16F SEL 16	16	15	85	25	11	16 ER...
19G SEL 16	19.05	18	90	30	12.5	
19X SEL 16	19.05	18	120	30	12.5	
20G SEL 16	20	19	90	30	13	
20X SEL 16	20	19	120	30	13	
25H SEL 16	25	24	100	30	15.5	
25X SEL 16	25.4	24	120	30	15.7	


► Use left hand toolholders (L) with right hand insert (ER)

Spare parts

Designation	Screw	Wrench		
TMS-SEL	S16	T-10/5		

QH-SIR/L


Screw type threading heads

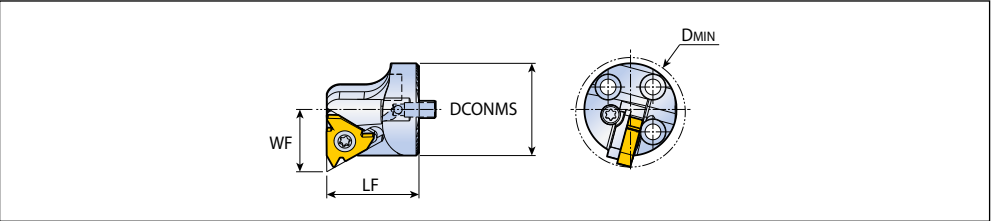

Designation	Dimension (mm)				Coolant hole	Insert
	DCONMS	LF	WF	DMIN		
QH25-SIR/L-16	25	26	16.2	29	●	16 IR/L...
QH32-SIR/L-16	32	27	19.7	36	●	
QH40-SIR/L-16	40	30	23.7	44	●	
QH32-SIR/L-22	32	32	21.6	38	●	22 IR/L...
QH40-SIR/L-22	40	38	25.6	46	●	

► Please refer to C17 page for spare parts

Anti-vibration shanks for boring

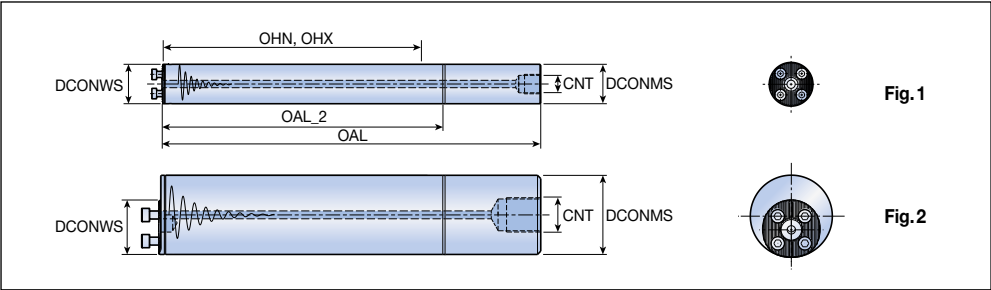

Designation	Dimension (mm)							Coolant hole	Fig.
	DCONMS	DCONWS	OAL	OAL_2	OHN	OHX	CNT		
QS16A-7D	16	16	156.3	100	55	92	G 1/8	●	1
QS16E-10D⁽¹⁾	16	16	204.3	-	96	140	-	●	1
QS20A-7D	20	20	200.3	125	70	120	G 1/4	●	1
QS20E-10D⁽¹⁾	20	20	260.3	-	120	180	-	●	1
QS25A-7D	25	25	257.5	155	88	155	G 1/4	●	1
QS25A-10D	25	25	332.5	255	155	230	G 1/4	●	1
QS25E-12D⁽¹⁾	25	25	380.0	-	230	280	G 1/8	●	1
QS25E-14D⁽¹⁾	25	25	430.0	-	280	330	G 1/8	●	1
QS32A-7D	32	32	323.0	190	120	192	G 3/8	●	1
QS32A-10D	32	32	419.0	320	192	288	G 3/8	●	1
QS32E-12D⁽¹⁾	32	32	480.0	-	288	352	G 1/4	●	1
QS32E-14D⁽¹⁾	32	32	544.0	-	352	416	G 1/4	●	1
QS40A-7D	40	40	411.0	240	128	251	G 1/2	●	1
QS40A-10D	40	40	531.0	410	248	368	G 1/2	●	1
QS40E-12D⁽¹⁾	40	40	608.0	-	368	448	G 3/8	●	1
QS40E-14D⁽¹⁾	40	40	688.0	-	448	528	G 3/8	●	1
QS50A-7D	50	40	523.0	305	168	318	G 1/2	●	2
QS50A-10D	50	40	673.0	520	318	468	G 1/2	●	2
QS50E-12D⁽¹⁾	50	40	768.0	-	468	568	G 1/2	●	2
QS50E-14D⁽¹⁾	50	40	868.0	-	568	668	G 1/2	●	2
QS60A-7D	60	40	633.0	380	208	388	G 3/4	●	2
QS60A-10D	60	40	813.0	630	388	568	G 3/4	●	2
QS60E-12D⁽¹⁾	60	40	920.0	-	588	688	G 3/4	●	2
QS60E-14D⁽¹⁾	60	40	1040.0	-	688	808	G 3/4	●	2

▶ ⁽¹⁾ Carbide shank

▶ OHX: Maximum overhang

▶ OHN: Minimum overhang

▶ OAL_2: Minimum length after shortening(only steel bar can be shortened)

Spare parts

Designation	Insert screw	Anvil screw	Anvil int. left Anvil ext. right	Anvil int. right Anvil ext. left	Torx wrench	Screw	Wrench
QH SIR-16	S16	A16	-	AI16	T-10/5		
QH SIL-16	S16	A16	AE16	-	T-10/5		
QH SIR-22	S22	A22	-	AI22	T-20/5		
QH SIL-22	S22	A22	AE22	-	T-20/5		
QS25						SH M4x0.7X12	L-W 3
QS32						SH M5x0.8X12	L-W 4
QS40/50/60						SH M6x1X16	L-W 5

16 E R M 1.50 ISO 2M TT9030

1 2 3 4 5 6 7 8

1 Insert size

INSL (mm)	IC
06	3.97 mm = 5/32"
08	4.76 mm = 3/16"
11	6.35 mm = 1/4"
16	9.52 mm = 3/8"
22	12.70 mm = 1/2"
27	15.88 mm = 5/8"

2 Application

E	- External
I	- Internal
UE	- U-type, external
UI	- U-type, Internal
UEI	- U-type, external and internal

U-type Regular type

3 Hand of tool

R	- Right-hand
L	- Left-hand
RL	- Right and left-hand

4 Type

M	- With a chip breaker
B	- Peripherally ground & chip breaker
☐	- No indication regular type

5 Pitch

Full profile		
Value by number		
0.35 - 9.0 mm (Thread pitch)		
72 - 2 TPI (Threads per inch)		
Partial profile		
Range by letter		
	mm	TPI
	(Thread pitch)	(Threads per inch)
A	0.5 - 1.5 mm	48 - 16
AG	0.5 - 3.0 mm	48 - 8
G	1.75 - 3.0 mm	14 - 8
N	3.5 - 5.0 mm	7 - 5
Q	5.5 - 6.0 mm	4.5 - 4
U	5.5 - 9.0 mm	4.5 - 2.75

6 Thread standard

60	- Partial profile 60°
55	- Partial profile 55°
ISO	- ISO metric
UN	- American UN
W	- Whitworth
BSPT	- British BSPT
RND	- Round DIN 405
TR	- Trapeze DIN 103
ACME	- ACME
STACME	- Stub ACME
ABUT	- American buttress
UNJ	- UNJ
MJ	- MJ ISO 5855
NPT	- NPT
API RD	- API round
BUT	- API buttress casing
API	- API
EL	- Extreme line casing
SAGE	- Sagengewinde DIN 513

7 No. of teeth (Optional)

2M	- 2 teeth
3M	- 3 teeth


8 Grades

Coated	
TT7010	
TT8010	
TT9030	
Uncoated	
P30	


Partial Profile 55°

T-THREAD


External & internal



External right hand shown
(Internal left hand)



U-type



- Application: General industry

Insert	Designation	Pitch		Dimension (mm)						Coated			Uncoated
		TP (mm)	TPI	IC	INSL	RE	PDY	PDX		TT7010	TT9030	TT8010	
 External  Regular  B/M	11ER/L A 55	0.5-1.5	48-16	6.35	11	0.05	0.8	0.9	●	●			
	16ER/L A 55	0.5-1.5	48-16	9.52	16	0.05	0.8	0.9		●			●
	16ER/L AG 55	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7	●	●	●		
	16ERB AG 55	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7		●			
	16ERM AG 55	0.5-3.0	48-8	9.52	16	0.07	1.2	1.7	●	●			●
	16ER/L G 55	1.75-3.0	14-8	9.52	16	0.20	1.2	1.7	●	●			
	16ERB G 55	1.75-3.0	14-8	9.52	16	0.20	1.2	1.7		●			
	16ERM G 55	1.75-3.0	14-8	9.52	16	0.23	1.2	1.7	●	●			
	22ER/L N 55	3.5-5.0	7-5	12.70	22	0.42	1.7	2.5	●	●			
	27ER Q 55	5.5-6.0	4.5-4	15.88	27	0.60	2.0	2.9		●			
 Internal  Regular  B/M	06IR/L A 55	0.5-1.25	48-20	3.97	6	0.05	0.5	0.6			●		
	08IR/L A 55	0.5-1.5	48-16	4.76	8	0.05	0.6	0.7		●	●		
	11IR/L A 55	0.5-1.5	48-16	6.35	11	0.05	0.8	0.9	●	●	●		
	16IR A 55	0.5-1.5	48-16	9.52	16	0.05	0.8	0.9		●			
	16IR/L AG 55	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7	●	●			
	16IRB AG 55	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7		●			
	16IRM AG 55	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7	●	●			
	16IR/L G 55	1.75-3.0	14-8	9.52	16	0.20	1.2	1.7	●	●			
	16IRB G 55	1.75-3.0	14-8	9.52	16	0.20	1.2	1.7		●			
	16IRM G 55	1.75-3.0	14-8	9.52	16	0.20	1.2	1.7	●	●			
 U	22IR/L N 55	3.5-5.0	7-5	12.70	22	0.42	1.7	2.5	●	●			●
	27IR/L Q 55	5.5-6.0	4.5-4	15.88	27	0.60	2.0	2.9		●			
	08UIRL U 55	1.75-2.0	14-11	4.76	8	0.10	0.9	4.0				●	
	22UEIRL U 55	5.5-8.0	4.5-3.25	12.70	22	0.60	0.9	11.0	●				





► ERB / ERM / IRB / IRM with pressed chip breaker

●: Standard items


Partial Profile 60°

T-THREAD

External & internal

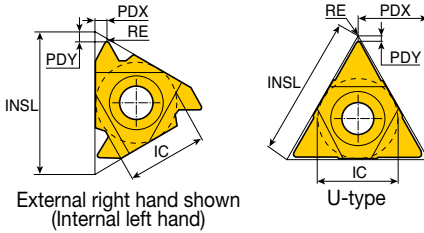


• Application: General industry

Insert	Designation	Pitch		Dimension (mm)					Coated			Uncoated
		TP (mm)	TPI	IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	P30
 Regular	11ER/L A 60	0.5-1.5	48-16	6.35	11	0.05	0.8	0.9		•		
	16ER/L A 60	0.5-1.5	48-16	9.52	16	0.08	1.0	0.9	•	•	•	
	16ERB A 60	0.5-1.5	48-16	9.52	16	0.08	1.0	0.9		•		
	16ERM A 60	0.5-1.5	48-16	9.52	16	0.07	0.8	0.9	•	•		•
	16ER/L AG 60	0.5-3.0	48-8	9.52	16	0.06	1.2	1.7	•	•	•	•
	16ERB AG 60	0.5-3.0	48-8	9.52	16	0.06	1.2	1.7		•		
	16ERM AG 60	0.5-3.0	48-8	9.52	16	0.08	1.2	1.7	•	•		•
	16ER/L G 60	1.75-3.0	14-8	9.52	16	0.22	1.2	1.7	•	•	•	
	16ERB G 60	1.75-3.0	14-8	9.52	16	0.22	1.2	1.7		•		
	16ERM G 60	1.75-3.0	14-8	9.52	16	0.25	1.0	1.5	•	•		
	22ER/L N 60	3.5-5.0	7-5	12.70	22	0.42	1.7	2.5	•	•	•	
	22ERM N 60	3.5-5.0	7-5	12.70	22	0.32	1.7	2.5	•	•		•
 Regular	27ER/L Q 60	5.5-6.0	4.5-4	15.88	27	0.63	2.0	3.0	•	•		•
	06IR/L A 60	0.5-1.25	48-20	3.97	6	0.05	0.5	0.6			•	
	06IRM A 60	0.5-1.25	48-20	3.97	6	0.05	0.5	0.6			•	
	08IR/L A 60	0.5-1.5	48-16	4.76	8	0.05	0.6	0.7			•	
	08IRM A 60	0.5-1.5	48-16	4.76	8	0.04	0.6	0.7		•	•	
	11IR/L A 60	0.5-1.5	48-16	6.35	11	0.05	0.8	0.9	•	•	•	
	11IRM A 60	0.5-1.5	48-16	6.35	11	0.05	0.7	0.9	•	•		
	16IR/L A 60	0.5-1.5	48-16	9.52	16	0.05	0.7	0.8	•	•	•	•
	16IRB A 60	0.5-1.5	48-16	9.52	16	0.04	0.8	0.9		•		
	16IRM A 60	0.5-1.5	48-16	9.52	16	0.05	0.8	0.9	•	•		
	16IR/L AG 60	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7	•	•	•	•
	16IRB AG 60	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7		•		
	16IRM AG 60	0.5-3.0	48-8	9.52	16	0.05	1.2	1.7	•	•		•
	16IR/L G 60	1.75-3.0	14-8	9.52	16	0.13	1.2	1.7		•	•	
	16IRB G 60	1.75-3.0	14-8	9.52	16	0.13	1.2	1.7		•		
	16IRM G 60	1.75-3.0	14-8	9.52	16	0.10	1.2	1.7	•	•		•
	22IR/L N 60	3.5-5.0	7-5	12.70	22	0.22	1.7	2.5	•	•		
	22IRM N 60	3.5-5.0	7-5	12.70	22	0.19	1.7	2.5	•	•		•
	27IR/L Q 60	5.5-6.0	4.5-4	15.88	27	0.40	1.9	2.4	•	•		•
 U	08UIRL U 60	1.25-2.0	18-12	4.76	8	0.10	0.8	4.3			•	
	22UEIRL U 60	5.5-8.0	4.5-3.25	12.70	22	0.28	0.6	0.6	•	•		
	27UEIRL U 60	6.5-9.0	4-2.75	15.88	27	0.50	1.0	13.7	•			

► ERB / ERM / IRB / IRM with pressed chip breaker


•: Standard items




External ISO Metric

Full profile (DIN13 12-1986 class: 6G)


T-THREAD



External right hand shown
(Internal left hand)



U-type



- Application: General industry

Insert	Designation	TP (mm)	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	
External	11ER/L 0.35 ISO	0.35	6.35	11	0.04	0.8	0.4		•		
	11ER 0.40 ISO	0.40	6.35	11	0.04	0.7	0.4		•		
Regular	11ER 0.45 ISO	0.45	6.35	11	0.05	0.7	0.4			•	
	11ER/L 0.50 ISO	0.50	6.35	11	0.05	0.6	0.6	•	•		
B/M	11ER 0.60 ISO	0.60	6.35	11	0.07	0.6	0.6		•		
	11ER 0.70 ISO	0.70	6.35	11	0.07	0.6	0.6		•		
	11ER/L 0.75 ISO	0.75	6.35	11	0.08	0.6	0.6		•		
	11ER 0.80 ISO	0.80	6.35	11	0.09	0.6	0.6		•		
	11ER/L 1.00 ISO	1.00	6.35	11	0.12	0.7	0.7		•		
	11ER 1.25 ISO	1.25	6.35	11	0.15	0.8	0.9		•		
	11ER/L 1.50 ISO	1.50	6.35	11	0.18	0.8	1.0	•	•		
	11ER 1.75 ISO	1.75	6.35	11	0.21	0.8	1.1	•			
	16ER/L 0.35 ISO	0.35	9.52	16	0.04	0.8	0.4		•		
	16ER/L 0.40 ISO	0.40	9.52	16	0.04	0.7	0.4		•		
	16ER 0.45 ISO	0.45	9.52	16	0.05	0.7	0.4		•		
	16ER/L 0.50 ISO	0.50	9.52	16	0.04	0.6	0.6	•	•		
	16ERM 0.50 ISO	0.50	9.52	16	0.04	0.6	0.6		•		
	16ER 0.60 ISO	0.60	9.52	16	0.07	0.6	0.6		•		
	16ER/L 0.70 ISO	0.70	9.52	16	0.07	0.6	0.6	•	•		
	16ER/L 0.75 ISO	0.75	9.52	16	0.08	0.6	0.6	•	•		
	16ERM 0.75 ISO	0.75	9.52	16	0.08	0.6	0.6		•		
	16ER/L 0.80 ISO	0.80	9.52	16	0.09	0.6	0.6	•	•		
	16ERB 0.80 ISO	0.80	9.52	16	0.09	0.6	0.6		•		
	16ER/L 1.00 ISO	1.00	9.52	16	0.12	0.7	0.7	•	•	•	•
	16ERB 1.00 ISO	1.00	9.52	16	0.12	0.7	0.7		•		
	16ERM 1.00 ISO	1.00	9.52	16	0.11	0.7	0.7	•	•		•
	16ER/L 1.25 ISO	1.25	9.52	16	0.15	0.8	0.9	•	•		
	16ERB 1.25 ISO	1.25	9.52	16	0.15	0.8	0.9		•		
	16ERM 1.25 ISO	1.25	9.52	16	0.14	0.8	0.9	•	•		
	16ER/L 1.50 ISO	1.50	9.52	16	0.18	0.8	1.0	•	•	•	•
	16ERB 1.50 ISO	1.50	9.52	16	0.18	0.8	1.0		•		
	16ERM 1.50 ISO	1.50	9.52	16	0.19	0.8	1.0	•	•		•
	16ER/L 1.75 ISO	1.75	9.52	16	0.21	0.9	1.2	•	•	•	
	16ERB 1.75 ISO	1.75	9.52	16	0.21	0.9	1.2		•		
	16ERM 1.75 ISO	1.75	9.52	16	0.20	0.9	1.2	•	•		




► ERB / ERM with pressed chip breaker

•: Standard items


External ISO Metric

Full profile (DIN13 12-1986 class: 6G)


T-THREAD



External right hand shown
(Internal left hand)



U-type




- Application: General industry

Insert	Designation	TP (mm)	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	P30
 Regular  B/M	16ER/L 2.00 ISO	2.00	9.52	16	0.25	1.0	1.3	●	●	●	●
	16ERB 2.00 ISO	2.00	9.52	16	0.25	1.0	1.3		●		
	16ERM 2.00 ISO	2.00	9.52	16	0.24	1.0	1.3	●	●		
	16ER/L 2.50 ISO	2.50	9.52	16	0.31	1.1	1.5	●	●		●
	16ERB 2.50 ISO	2.50	9.52	16	0.31	1.1	1.5		●		
	16ERM 2.50 ISO	2.50	9.52	16	0.30	1.1	1.5	●	●		
	16ER/L 3.00 ISO	3.00	9.52	16	0.38	1.2	1.6	●	●	●	
	16ERB 3.00 ISO	3.00	9.52	16	0.38	1.2	1.6		●		
	16ERM 3.00 ISO	3.00	9.52	16	0.38	1.2	1.6	●	●		●
	22ER/L 3.50 ISO	3.50	12.70	22	0.44	1.6	2.3	●	●		
	22ERM 3.50 ISO	3.50	12.70	22	0.44	1.6	2.3		●		
	22ER/L 4.00 ISO	4.00	12.70	22	0.52	1.6	2.3	●	●		●
	22ERM 4.00 ISO	4.00	12.70	22	0.52	1.6	2.3		●		
	22ER/L 4.50 ISO	4.50	12.70	22	0.58	1.7	2.4	●	●		
	22ER/L 5.00 ISO	5.00	12.70	22	0.64	1.7	2.5	●	●		
	22ER/L 6.00 ISO	6.00	12.70	22	0.78	2.0	2.7	●			
	27ER 5.50 ISO	5.50	15.88	27	0.70	1.9	2.7		●		
	27ER/L 6.00 ISO	6.00	15.88	27	0.78	2.0	2.9	●	●	●	
 U	22UERL 5.50 ISO	5.50	12.70	22	0.70	2.3	11.0	●			
	22UERL 6.00 ISO	6.00	12.70	22	0.78	2.6	11.0	●		●	
	27UERL 8.00 ISO	8.00	15.88	27	1.08	2.4	13.7		●		

► ERB / ERM with pressed chip breaker


●: Standard items




Internal ISO Metric

Full profile (DIN13 12-1986 class: 6H)


T-THREAD



External right hand shown
(Internal left hand)



U-type



- Application: General industry

Insert	Designation	TP (mm)	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	
Internal	06IR/L 0.50 ISO	0.50	3.97	6	0.04	0.6	0.4			•	P30
	06IR/L 0.75 ISO	0.75	3.97	6	0.06	0.6	0.5			•	
	06IR/L 1.00 ISO	1.00	3.97	6	0.05	0.6	0.6			•	
Regular	06IR/L 1.25 ISO	1.25	3.97	6	0.07	0.6	0.6			•	
	08IR/L 0.50 ISO	0.50	4.76	8	0.04	0.6	0.4			•	
	08IR 0.75 ISO	0.75	4.76	8	0.05	0.6	0.5			•	
B/M	08IR/L 1.00 ISO	1.00	4.76	8	0.07	0.6	0.6		•	•	
	08IR/L 1.25 ISO	1.25	4.76	8	0.09	0.7	0.7		•	•	
	08IR/L 1.50 ISO	1.50	4.76	8	0.10	0.6	0.7		•	•	
	08IR/L 1.75 ISO	1.75	4.76	8	0.15	0.6	0.9			•	
	11IR/L 0.35 ISO	0.35	6.35	11	0.04	0.8	0.3		•		
	11IR 0.40 ISO	0.40	6.35	11	0.03	0.8	0.4		•		
	11IR/L 0.50 ISO	0.50	6.35	11	0.04	0.8	0.6	•	•		
	11IRB 0.50 ISO	0.50	6.35	11	0.04	0.8	0.6		•		
	11IRM 0.50 ISO	0.50	6.35	11	0.04	0.3	0.4		•		
	11IR 0.70 ISO	0.70	6.35	11	0.05	0.6	0.6		•		
	11IR/L 0.75 ISO	0.75	6.35	11	0.05	0.6	0.6		•		
	11IRB 0.75 ISO	0.75	6.35	11	0.05	0.6	0.6		•		
	11IRM 0.75 ISO	0.75	6.35	11	0.06	0.3	0.5		•		
	11IR 0.80 ISO	0.80	6.35	11	0.04	0.6	0.6		•		
	11IR/L 1.00 ISO	1.00	6.35	11	0.07	0.6	0.7	•	•	•	•
	11IRB 1.00 ISO	1.00	6.35	11	0.07	0.6	0.6		•		
	11IRM 1.00 ISO	1.00	6.35	11	0.05	0.6	0.7		•		
	11IR/L 1.25 ISO	1.25	6.35	11	0.09	0.8	0.8		•		
	11IR/L 1.50 ISO	1.50	6.35	11	0.12	0.8	1.0	•	•	•	•
	11IRM 1.50 ISO	1.50	6.35	11	0.08	0.8	1.0	•	•		
	11IR/L 1.75 ISO	1.75	6.35	11	0.12	0.8	1.0		•		
	11IRB 1.75 ISO	1.75	6.35	11	0.12	0.8	1.0		•		
	11IRM 1.75 ISO	1.75	6.35	11	0.15	0.6	0.9		•		
	11IR/L 2.00 ISO	2.00	6.35	11	0.14	0.8	0.9	•	•	•	
	11IRM 2.00 ISO	2.00	6.35	11	0.16	0.6	1.0		•		
	16IR 0.35 ISO	0.35	9.52	16	0.02	0.6	0.3		•		
	16IR/L 0.40 ISO	0.40	9.52	16	0.03	0.6	0.4		•		
	16IR/L 0.50 ISO	0.50	9.52	16	0.04	0.6	0.6	•	•		
	16IR 0.60 ISO	0.60	9.52	16	0.04	0.6	0.6		•		




► IRB / IRM with pressed chip breaker

•: Standard items



Internal ISO Metric

Full profile (DIN13 12-1986 class: 6H)

T-THREAD



External right hand shown
(Internal left hand)




• Application: General industry

Insert	Designation	TP (mm)	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	
 Internal  Regular  B/M	16IR/L 0.70 ISO	0.70	9.52	16	0.05	0.6	0.6	●	●		
	16IR/L 0.75 ISO	0.75	9.52	16	0.05	0.6	0.6	●	●		
	16IR/L 0.80 ISO	0.80	9.52	16	0.05	0.6	0.6	●			
	16IR/L 1.00 ISO	1.00	9.52	16	0.07	0.7	0.8	●	●		●
	16IRB 1.00 ISO	1.00	9.52	16	0.07	0.7	0.8		●		
	16IRM 1.00 ISO	1.00	9.52	16	0.05	0.6	0.7	●	●		●
	16IR/L 1.25 ISO	1.25	9.52	16	0.09	0.8	0.9	●	●		
	16IRB 1.25 ISO	1.25	9.52	16	0.09	0.7	0.8		●		
	16IRM 1.25 ISO	1.25	9.52	16	0.06	0.8	0.9	●	●		
	16IR/L 1.50 ISO	1.50	9.52	16	0.12	0.9	1.0	●	●	●	●
	16IRB 1.50 ISO	1.50	9.52	16	0.12	0.1	1.2		●		
	16IRM 1.50 ISO	1.50	9.52	16	0.08	0.8	1.0	●	●		●
	16IR/L 1.75 ISO	1.75	9.52	16	0.12	0.9	1.2	●	●		
	16IRB 1.75 ISO	1.75	9.52	16	0.12	0.9	1.2		●		
	16IRM 1.75 ISO	1.75	9.52	16	0.10	0.9	1.2	●	●		
	16IR/L 2.00 ISO	2.00	9.52	16	0.16	0.9	1.2	●	●	●	
	16IRB 2.00 ISO	2.00	9.52	16	0.14	1.0	1.2		●		
	16IRM 2.00 ISO	2.00	9.52	16	0.11	1.0	1.3	●	●		
	16IR/L 2.50 ISO	2.50	9.52	16	0.18	1.1	1.5	●	●	●	
	16IRB 2.50 ISO	2.50	9.52	16	0.18	1.2	1.5		●		
	16IRM 2.50 ISO	2.50	9.52	16	0.14	1.1	1.5	●	●		
	16IR/L 3.00 ISO	3.00	9.52	16	0.21	1.1	1.5	●	●	●	
	16IRB 3.00 ISO	3.00	9.52	16	0.21	1.1	1.5		●		
	16IRM 3.00 ISO	3.00	9.52	16	0.22	1.1	1.5	●	●		
 U	22IL 3.00 ISO	3.00	12.70	22	0.17	1.1	1.5			●	
	22IR/L 3.50 ISO	3.50	12.70	22	0.23	1.6	2.3	●	●		
	22IR/L 4.00 ISO	4.00	12.70	22	0.27	1.6	2.3	●	●		●
	22IR/L 4.50 ISO	4.50	12.70	22	0.31	1.6	2.3	●	●		
	22IR/L 5.00 ISO	5.00	12.70	22	0.32	1.7	2.5	●	●		
	27IR/L 5.50 ISO	5.50	15.88	27	0.36	1.8	2.5	●	●		
	27IR/L 6.00 ISO	6.00	15.88	27	0.40	1.8	2.5	●	●		
	08UIRL 2.00 ISO	2.00	4.76	8	0.14	0.8	4.3				
	22UIRL 5.50 ISO	5.50	12.70	22	0.36	2.3	11.0	●			
	22UIRL 6.00 ISO	6.00	12.70	22	0.40	2.1	11.0	●			
	27UIRL 8.00 ISO	8.00	15.88	27	0.50	2.5	13.8		●		

► IRB / IRM with pressed chip breaker

●: Standard items



T-THREAD

The diagram illustrates a double-flute screw thread. It shows a cross-section of the thread with a 60-degree angle between the flutes. The lead is indicated as 1/4TP (threads per inch), and the pitch is indicated as 1/8TP. The labels 'Nut' and 'Screw' are present, indicating the components being joined.


- [illegible]



Cutting Condition

●: Standard items

Full profile, UN, UNC, UNF, UNEF



A cross-sectional diagram of a screw thread. The top part is labeled 'Nut' and the bottom part is labeled 'Screw'. The thread profile is shown with a 60-degree angle indicated by an arc. The pitch is defined as the distance between corresponding points on adjacent threads, labeled as 1/4TP. The distance between the crests of two adjacent threads is labeled as 1/8TP.

- [illegible]




- : Standard items


External American UN



Full profile, UN, UNC, UNF, UNEF



External right hand shown
(Internal left hand)




• Application: General industry

Insert	Designation	TPI	Dimension (mm)					Coated			Uncoated	
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	P30	
External	16ER/L 12 UN	12	9.52	16	0.26	1.1	1.4	●	●			
	16ERB 12 UN	12	9.52	16	0.26	1.1	1.4		●			
Regular	16ERM 12 UN	12	9.52	16	0.25	1.1	1.4	●	●		●	
	16ER 11.5 UN	11.5	9.52	16	0.27	1.1	1.5		●			
B/M	16ER/L 11 UN	11	9.52	16	0.28	1.1	1.5	●	●			
	16ERB 11 UN	11	9.52	16	0.28	1.1	1.5		●			
	16ER/L 10 UN	10	9.52	16	0.32	1.1	1.5	●	●			
	16ERB 10 UN	10	9.52	16	0.32	1.1	1.5		●			
	16ERM 10 UN	10	9.52	16	0.32	1.1	1.5		●			
	16ER/L 9 UN	9	9.52	16	0.36	1.2	1.7		●			
	16ERB 9 UN	9	9.52	16	0.36	1.2	1.7		●			
	16ER/L 8 UN	8	9.52	16	0.41	1.2	1.6	●	●			
	16ERB 8 UN	8	9.52	16	0.41	1.2	1.6		●			
	16ERM 8 UN	8	9.52	16	0.41	1.2	1.6	●	●			
	22ER 7 UN	7	12.70	22	0.47	1.6	2.3		●			
	22ER/L 6 UN	6	12.70	22	0.67	1.6	2.3		●			
	22ER 5 UN	5	12.70	22	0.67	1.7	2.5	●	●			
	27ER 4.5 UN	4.5	15.88	27	0.75	1.9	2.7		●			
	27ER/L 4 UN	4	15.88	27	0.85	2.1	3.0	●	●			
					</							


Internal American UN

Full profile, UN, UNC, UNF, UNEF


T-THREAD



External right hand shown
(Internal left hand)




U-type



• Application: General industry

Insert	Designation	TPI	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	
Internal	06IR 32 UN	32	3.97	6	0.04	0.8	0.5			•	
	06IR/L 24 UN	24	3.97	6	0.05	0.7	0.6			•	
Regular	06IR/L 20 UN	20	3.97	6	0.06	0.6	0.6			•	
	06IR 18 UN	18	3.97	6	0.07	0.6	0.7			•	
B/M	08IR 32 UN	32	4.76	8	0.04	0.6	0.5			•	
	08IR 28 UN	28	4.76	8	0.04	0.6	0.6			•	
	08IR 24 UN	24	4.76	8	0.05	0.6	0.6			•	
	08IR/L 20 UN	20	4.76	8	0.06	0.6	0.7			•	
	08IR 18 UN	18	4.76	8	0.07	0.6	0.7			•	
	08IR 16 UN	16	4.76	8	0.09	0.6	0.7			•	
	08IR 14 UN	14	4.76	8	0.10	0.6	0.8		•	•	
	11IR 32 UN	32	6.35	11	0.04	0.6	0.6		•		
	11IR 28 UN	28	6.35	11	0.04	0.6	0.7		•		
	11IR 24 UN	24	6.35	11	0.05	0.7	0.8		•		
	11IR 20 UN	20	6.35	11	0.06	0.8	0.9		•		
	11IR/L 18 UN	18	6.35	11	0.07	0.8	1.0		•		
	11IR/L 16 UN	16	6.35	11	0.09	0.9	1.1		•		
	11IR/L 14 UN	14	6.35	11	0.10	0.9	1.1		•		
	11IR 12 UN	12	6.35	11	0.12	0.9	1.1	•			
	11IR 11 UN	11	6.35	11	0.14	0.8	1.1	•	•		
	16IR 32 UN	32	9.52	16	0.04	0.6	0.6	•	•		
	16IR/L 28 UN	28	9.52	16	0.04	0.6	0.7		•		
	16IR 24 UN	24	9.52	16	0.05	0.7	0.8		•		
	16IRB 24 UN	24	9.52	16	0.05	0.7	0.8		•		
	16IR/L 20 UN	20	9.52	16	0.06	0.8	0.9		•		
	16IRB 20 UN	20	9.52	16	0.06	0.8	0.9		•		
	16IRM 20 UN	20	9.52	16	0.06	0.8	0.9		•		
	16IR/L 18 UN	18	9.52	16	0.07	0.8	1.0		•		
	16IRB 18 UN	18	9.52	16	0.07	0.8	1.0		•		
	16IRM 18 UN	18	9.52	16	0.08	0.8	1.0	•	•		




- IRB / IRM with pressed chip breaker
- Tolerance: Class 2B, ANSI B1, 3M-1986

• Standard items


Internal American UN

Full profile, UN, UNC, UNF, UNEF


T-THREAD



External right hand shown
(Internal left hand)




U-type



- Application: General industry

Insert	Designation	TPI	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	
 Internal  Regular  B/M	16IR/L 16 UN	16	9.52	16	0.09	0.9	1.1	•	•		
	16IRB 16 UN	16	9.52	16	0.09	0.9	1.1	•	•		
	16IRM 16 UN	16	9.52	16	0.09	0.9	1.1	•	•		
	16IR/L 14 UN	14	9.52	16	0.10	0.9	1.2	•	•		
	16IRB 14 UN	14	9.52	16	0.10	0.9	1.2	•	•		
	16IRM 14 UN	14	9.52	16	0.11	0.9	1.2	•	•		
	16IR/L 12 UN	12	9.52	16	0.12	1.1	1.4	•	•	•	
	16IRB 12 UN	12	9.52	16	0.12	1.1	1.4	•	•		
	16IRM 12 UN	12	9.52	16	0.12	1.1	1.4	•	•		
	16IR 11.5 UN	11.5	9.52	16	0.13	1.1	1.5	•	•		
	16IR 11 UN	11	9.52	16	0.14	1.1	1.5	•	•		
	16IR 10 UN	10	9.52	16	0.15	1.1	1.5	•	•		
	16IRB 10 UN	10	9.52	16	0.15	1.1	1.5	•	•		
	16IR 9 UN	9	9.52	16	0.17	1.2	1.7	•	•		
	16IR 8 UN	8	9.52	16	0.19	1.1	1.5	•	•		
	16IRB 8 UN	8	9.52	16	0.19	1.1	1.5	•	•		
	16IRM 8 UN	8	9.52	16	0.20	1.1	1.5	•	•		
	22IR 7 UN	7	12.70	22	0.22	1.6	2.3	•	•		
	22IR 6 UN	6	12.70	22	0.26	1.6	2.3	•	•		
	22IR 5 UN	5	12.70	22	0.32	1.6	2.3	•	•		
	27IR 4 UN	4	15.88	27	0.41	1.8	2.7	•	•		
 Internal U	08UIRL 13 UN	13	4.76	8	0.10	1.0	4.0	•	•		



- IRB / IRM with pressed chip breaker
- Tolerance: Class 2B, ANSI B1, 3M-1986

- : Standard items

T-THREAD

A cross-sectional diagram of a screw thread. The top part is labeled 'Nut' and the bottom part is labeled 'Screw'. The thread angle is indicated as 60°. The distance from the crest to the root of the nut thread is labeled 1/4TP. The distance from the crest to the root of the screw thread is labeled 1/8TP.

- [illegible]



Cutting Condition


C52-C60

●: Standard items

T-THREAD

External right hand shown
(Internal left hand)

U-type




- [illegible]




- : Standard items

T-THREAD





- [illegible]




●: Standard items

T-THREAD

External right hand shown
(Internal left hand)



- Application: General industry, fittings and pipe couplings

[illegible]



- ▶ IRB / IRM with pressed chip breaker
- ▶ Tolerance: Medium class

●: Standard items

External & Internal Whitworth



Full profile, multi-tooth, BSW, BSF, BSP



- Application: General industry, fittings and pipe couplings

Insert	Designation	TPI	Dimension (mm)					CIC ⁽¹⁾	Coated			Uncoated	
			IC	INSL	RE	PDY	PDX		TT7010	TT9030	TT8010	P30	
Internal / External	16ER/IR 14 W 2M	14	9.52	16	0.23	1.7	2.7	2		●			
	22IR 11 W 2M	11	12.70	22	0.27	2.3	3.4	2		●			
													




► ⁽¹⁾ Number of teeth per corner

●: Standard items


External & Internal NPT



Full profile, national pipe threads (ANSI/ASME B1.20.1-1983)




External right hand shown
(Internal left hand)



- Application: Steam, gas and water pipes

Insert	Designation	TPI	Dimension (mm)					Coated			Uncoated
			IC	INSL	RE	PDY	PDX	TT7010	TT9030	TT8010	
External  Regular  B/M	16ER 27 NPT	27	9.52	16	0.04	0.7	0.8		•		
	16ER/L 18 NPT	18	9.52	16	0.06	0.8	1.0	•	•		
	16ERB 18 NPT	18	9.52	16	0.06	0.8	1.0		•		
	16ERM 18 NPT	18	9.52	16	0.05	0.8	1.0		•		
	16ER/L 14 NPT	14	9.52	16	0.07	0.9	1.2			•	
	16ERB 14 NPT	14	9.52	16	0.07	0.9	1.2		•		
	16ERM 14 NPT	14	9.52	16	0.05	0.9	1.2	•	•		•
	16ER/L 11.5 NPT	11.5	9.52	16	0.09	1.1	1.5	•	•		•
	16ERB 11.5 NPT	11.5	9.52	16	0.09	1.1	1.5		•		
	16ERM 11.5 NPT	11.5	9.52	16	0.09	1.1	1.5		•		
	16ER 8 NPT	8	9.52	16	0.12	1.3	1.8	•	•		
	16ERB 8 NPT	8	9.52	16	0.12	1.3	1.8		•		
Internal  Regular  B/M	06IR 27 NPT	27	3.97	6	0.04	0.6	0.6			•	
	08IR 27 NPT	27	4.76	8	0.04	0.6	0.6			•	
	08IR/L 18 NPT	18	4.76	8	0.06	0.6	0.6			•	•
	11IR/L 18 NPT	18	6.35	11	0.06	0.8	1.0	•	•		
	11IR/L 14 NPT	14	6.35	11	0.07	0.8	1.0		•		
	16IR 18 NPT	18	9.52	16	0.06	0.8	1.0		•		
	16IR/L 14 NPT	14	9.52	16	0.07	0.9	1.2	•	•	•	
	16IRB 14 NPT	14	9.52	16	0.07	0.9	1.2		•		
	16IRM 14 NPT	14	9.52	16	0.05	0.9	1.2		•		
	16IR 11.5 NPT	11.5	9.52	16	0.09	1.1	1.5		•		
	16IRB 11.5 NPT	11.5	9.52	16	0.09	1.1	1.5		•		
	16IRM 11.5 NPT	11.5	9.52	16	0.09	1.1	1.5	•	•		•
	16IR/L 8 NPT	8	9.52	16	0.12	1.3	1.8		•		
	16IRB 8 NPT	8	9.52	16	0.12	1.3	1.8		•		
	16IRM 8 NPT	8	9.52	16	0.12	1.3	1.8		•		





► ERB / ERM / IRB / IRM with pressed chip breaker

•: Standard items

External & Internal NPT




Full profile, multi-tooth, national pipe threads



- Application: Steam, gas and water pipes

Insert	Designation	TPI	Dimension (mm)					CICT ⁽¹⁾	Coated			Uncoated
			IC	INSL	RE	PDY	PDX		TT7010	TT9030	TT8010	
Internal / External	22ER/IR 11.5 NPT 2M	11.5	12.70	22	0.09	2.3	3.5	2		●		
	27ER 11.5 NPT 3M	11.5	15.88	27	0.09	3.3	5.5	3		●		
	27ER/IR 8 NPT 2M	8	15.88	27	0.12	3.1	5.0	2		●		
												



► ⁽¹⁾ Number of teeth per corner

●: Standard items

T-THREAD


Diagram illustrating the geometry of a screw thread. The thread profile is shown with a 30° flank angle. The thread angle is 90°. The thread pitch is 1°47'.

- [illegible]


- | | |
|---|---|
|  |  |
| C11-C17 | C52-C60 |

T-THREAD

External right hand shown
(Internal left hand)



- [illegible]




●: Standard items


External & Internal STUB ACME



ASME / ANSI B.1.8-1988 class: 2G



External right hand shown
(Internal left hand)



- Application: Control valves and modified ACME thread forms

Insert	Designation	TPI	Dimension (mm)				Coated			Uncoated
			IC	INSL	PDY	PDX	TT7010	TT9030	TT8010	P30
External  Regular	16ER 16 STACME	16	9.52	16	1.0	1.0		●		
	16ER 12 STACME	12	9.52	16	1.2	1.2		●		
	16ER 10 STACME	10	9.52	16	1.3	1.3		●		
	16ER 8 STACME	8	9.52	16	1.5	1.5	●	●		●
	16ER 6 STACME	6	9.52	16	1.7	1.7	●	●		
	22ER/L 5 STACME	5	12.70	22	2.0	2.3		●		
	27ER 4 STACME	4	15.88	27	2.2	2.4		●		
	27ER/L 3 STACME	3	15.88	27	2.8	2.9	●			
Internal  Regular	16IR 16 STACME	16	9.52	16	1.0	1.0				●
	16IR 12 STACME	12	9.52	16	1.2	1.2		●		
	16IR/L 10 STACME	10	9.52	16	1.2	1.2		●		●
	16IR 8 STACME	8	9.52	16	1.5	1.5		●		●
	16IR/L 6 STACME	6	9.52	16	1.6	1.7	●	●		
	22IR 5 STACME	5	12.70	22	2.0	2.1	●			●
	22UIR 3 STACME	3	12.70	22	3.3	11.0	●			
	27IR 4 STACME	4	15.88	27	2.3	2.4		●		
	27IR/L 3 STACME	3	15.88	27	2.8	2.9	●			



C11-C17





C52-C60

●: Standard items

External & Internal ACME




ASME / ANSI B.1.8-1988 class: 3G

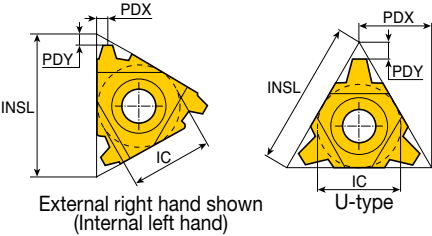

• Application: Feed screws

Insert	Designation	TPI	Dimension (mm)				Coated			Uncoated	
			IC	INSL	PDY	PDX	TT7010	TT9030	TT8010	P30	
 External Regular	16ER 16 ACME	16	9.52	16	0.9	1.0		●			
	16ER 12 ACME	12	9.52	16	1.1	1.2		●			
	16ER 10 ACME	10	9.52	16	1.3	1.3		●			
	16ER/L 8 ACME	8	9.52	16	1.5	1.5		●			
	22ER/L 6 ACME	6	12.70	22	1.8	2.1		●		●	
	22ER/L 5 ACME	5	12.70	22	2.0	2.3		●			
	22ER/L 4 ACME	4	12.70	22	2.1	2.2		●			
 Internal Regular	27ER/L 4 ACME	4	15.88	27	2.3	2.7	●	●			
	16IR 16 ACME	16	9.52	16	0.9	1.0	●				
	16IR 12 ACME	12	9.52	16	1.1	1.2		●			
	16IR/L 10 ACME	10	9.52	16	1.3	1.3	●				
	16IR 8 ACME	8	9.52	16	1.5	1.5	●	●			
	22IR/L 6 ACME	6	12.70	22	1.8	2.1		●			
	22IR/L 5 ACME	5	12.70	22	2.0	2.3		●			
 Internal / External U	22IR 4 ACME	4	12.70	22	2.1	2.2		●			
	27IR/L 4 ACME	4	15.88	27	2.3	2.7	●	●			
	22UERL 4 ACME	4	12.70	22	2.3	11		●		●	
	27UERL 3 ACME	3	15.88	27	2.8	13.7		●			
	27UIRL 3 ACME	3	15.88	27	2.8	13.7		●			

●: Standard items



T-THREAD

5/16TP

60°

Rmax 0.18042TP
Rmin 0.15011TP

Nut



Screw

- [illegible]

- | | |
|---|---|
|  |  |
| C11-C17 | C52-C60 |


Full profile

T-THREAD



- [illegible]

- : Standard items




T-THREAD

Diagram illustrating the cross-section of a screw thread. The thread profile is shown with a 60° angle. The pitch is indicated as 5/16TP. The radii are specified as $R_{max} 0.18042TP$ and $R_{min} 0.15011TP$. The labels "Nut" and "Screw" are present.


- [illegible]

-


DIN 103



External right hand shown
(Internal left hand)



- Application: Feed screws

[illegible]


- ▶ ⁽¹⁾ One cutting edge only
- ▶ DIN 103 04 / 1977, 150 2901 / 1977 Class 7H (7E)

- : Standard items


External & Internal PG



Full profile (DIN 40430)




External right hand shown
(Internal left hand)



- Application: Electrical industry

Insert	Designation	TPI	Dimension (mm)				Coated			Uncoated	
			IC	INSL	PDY	PDX	TT7010	TT9030	TT8010	P30	
 External Regular	16ER 16 PG	16	9.52	16	0.8	1.0		•			
	16ER 18 PG	18	9.52	16	0.8	0.9		•			
	16ER 20 PG	20	9.52	16	0.7	0.8		•			
 Internal Regular	11IR 18 PG	18	6.35	11	0.8	0.9		•			
	16IR 16 PG	16	9.52	16	0.8	1.0		•			
	16IR 18 PG	18	9.52	16	0.8	0.9		•			



- : Standard items



External & Internal Sagengwinde




DIN 513

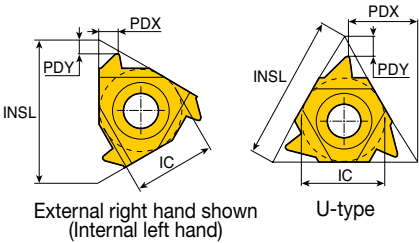



• Application: For high forces in one direction

Insert	Designation	TP (mm)	Dimension (mm)				Coated			Uncoated	
			IC	INSL	PDY	PDX	TT7010	TT9030	TT8010	P30	
 External Regular	16ER/L 2 SAGE	2.0	9.52	16	1.1	1.6		●			
	22ER 3 SAGE	3.0	12.70	22	1.5	2.4		●			
	22ER 4 SAGE	4.0	12.70	22	1.9	3.1	●	●			
 External U	22UER 5 SAGE	5.0 ⁽¹⁾	12.70	22	1.2	11.6		●			
	22UER/L 6 SAGE	6.0 ⁽¹⁾	12.70	22	1.2	11.7		●			
 Internal Regular	16IR 2 SAGE	2.0	9.52	16	1.2	1.7		●			
	22IR 3 SAGE	3.0	12.70	22	1.9	2.9		●			
	22IR 4 SAGE	4.0	12.70	22	2.3	3.5		●			
 Internal U	22UIR 5 SAGE	5.0 ⁽¹⁾	12.70	22	1.9	11.7		●			
	22UIR 6 SAGE	6.0 ⁽¹⁾	12.70	22	2.1	11.9		●			




► ⁽¹⁾ Requires special anvil

●: Standard items

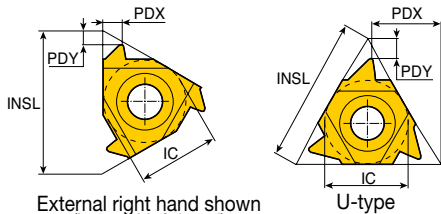

• Application: For high forces in one direction

Insert	Designation	TPI	Dimension (mm)				Coated			Uncoated
			IC	INSL	PDY	PDX	TT7010	TT9030	TT8010	P30
 External Regular	16ER 20 ABUT	20	9.52	16	1.0	1.3		●		
	16ER 16 ABUT	16	9.52	16	1.1	1.5		●		
	16ER 12 ABUT	12	9.52	16	1.4	2.0		●		
	16ER/L 10 ABUT	10	9.52	16	1.5	2.3		●		
	22ER 8 ABUT	8	12.70	22	2.1	3.3		●		
	22ER 6 ABUT	6	12.70	22	2.1	3.4		●		
 External U	22UER 4 ABUT	4	12.70	22	2.3	9.5		●		
	27UER 3 ABUT	3	15.88	27	3.1	11.7		●		
 Internal Regular	11IR 20 ABUT	20	6.35	11	1.0	1.3		●		
	11IR 16 ABUT	16	6.35	11	1.0	1.5		●		
	16IR 20 ABUT	20	9.52	16	1.0	1.3		●		
	16IR/L 16 ABUT	16	9.52	16	1.0	1.5		●		
	16IR/L 12 ABUT	12	9.52	16	1.4	2.0	●	●		
	16IR 10 ABUT	10	9.52	16	1.5	2.3		●		
	22IR 8 ABUT	8	12.70	22	2.1	3.3		●		
	22IR/L 6 ABUT	6	12.70	22	2.1	3.4		●		
 Internal U	22UIR 4 ABUT	4	12.70	22	2.3	9.5	●			




► ANSI B1.9-1973 class 2


●: Standard items

DIN 405

T-THREAD



External right hand shown
(Internal left hand)




- Application: Pipe couplings in fire fighting and food industries

[illegible]


- ▶ ERM / IRM with pressed chip breaker
- ▶ Tolerance class 7H

- : Standard items

Round profile



External right hand shown
(Internal left hand)



- Application: Oil & gas industry

Insert	Designation	TPI	Dimension (mm)					Coated			Uncoated
			IC	INSL	IPF	PDY	PDX	TT7010	TT9030	TT8010	P30
 External Regular	16ER 10 API RD	10	9.52	16	0.75	1.5	1.4	●	●		
	16ER/L 8 API RD	8	9.52	16	0.75	1.3	1.6	●	●		
 Internal Regular	16IR 10 API RD	10	9.52	16	0.75	1.5	1.4	●	●		
	16IR/L 8 API RD	8	9.52	16	0.75	1.3	1.6	●	●		



Cutting Condition



C11-C17





C52-C60

- Standard items

API - Oil Threads



Round profile, multi-tooth



• Application: Oil & gas industry



Insert	Designation	TPI	Dimension (mm)							CIC ⁽¹⁾	Coated			Uncoated	
			IC	INSL	RE	IPF	PDY	PDX	TT7010		TT9030	TT8010	P30		
Internal / External 	22ER/IR 10 API RD 2M	10	12.70	22	0.36	0.75	2.4	3.7	2		●				
	27ER/IR 8 API RD 2M	8	15.88	27	0.43	0.75	3.0	4.5	2		●				



- ▶ API Spec 5B8-1996
- ▶ ⁽¹⁾ Number of teeth per corner

●: Standard items

API - Oil Thread Profile



• Application: Oil & gas industry


Insert	Designation	TPI	Dimension (mm)						Connection No. or size	Coated			Uncoated	
			IC	INSL	IPF	PDY	PDX	TT7010		TT9030	TT8010	P30		
 Regular	22ER 5 API 403⁽¹⁾	5	12.70	22	3	1.8	2.5	2.375"-4.5"REG		●				
	27ER 4 API 382⁽²⁾	4	15.88	27	2	2.1	2.8	NC23-NC50		●	●			
	27ER 4 API 383⁽²⁾	4	15.88	27	3	2.1	2.8	NC56-NC77			●			
	27ER/L 4 API 502⁽³⁾	4	15.88	27	2	2.0	3.0	6-5/8"REG		●	●			
	27ER 4 API 503⁽³⁾	4	15.88	27	3	2.0	3.0	5-1/2, 7-5/8, 8-5/8"REG			●			
 Regular	22IR 5 API 403⁽¹⁾	5	12.70	22	3	1.8	2.5	2.375"-4.5"REG		●	●			
	27IR 4 API 382⁽²⁾	4	15.88	27	2	2.1	2.8	NC23-NC50		●	●			
	27IR/L 4 API 502⁽³⁾	4	15.88	27	2	2.0	3.0	6-5/8"REG		●				



- ▶ ⁽¹⁾ V-0.040 ⁽²⁾ V-0.038R ⁽³⁾ V-0.050
- ▶ 0.050, API spec 74-1994


●: Standard items

Buttress Casing / Extreme Line Casing




External right hand shown
(Internal left hand)

Buttress casing



Extreme line casing



• Application: Oil & gas industry

Insert	Designation	TPI	Dimension (mm)					Connection No. or size	Coated			Uncoated
			IC	INSL	IPF	PDY	PDX		TT7010	TT9030	TT8010	
 Buttress	22ER/IR 5 BUT 0.75	5	12.70	22	0.75	2.2	2.4	4-1/2" - 13-3/8"	•	•		
	22ER/IR 5 BUT 1.0	5	12.70	22	1.0	2.3	2.4	16" - 20"	•			
 Extreme line casing	22ER 6 EL 1.5	6	12.70	22	1.5	1.9	1.9	5" - 7-5/8"		•		
	22IR 6 EL 1.5	6	12.70	22	1.5	1.9	1.9	5" - 7-5/8"		•		



C11-C17



C52-C60

► ANSI B1.9-1973 class 2

•: Standard items

Recommended Cutting Conditions



Machining data for thread turning insert

ISO	Material	Condition	Tensile strength (N/mm ²)	Hardness HB	Material No.
P	Non-alloy steel, cast steel, free cutting steel	<0.25%C Annealed	420	125	1
		≥0.25%C Annealed	650	190	2
		<0.55%C Quenched and tempered	850	250	3
		≥0.55%C Annealed	750	220	4
		Quenched and tempered	1000	300	5
	Low alloy steel and cast steel (Less than 5% of alloying elements)	Annealed	600	200	6
			930	275	7
		Quenched and tempered	1000	300	8
			1200	350	9
	High alloy steel, cast steel and tool steel	Annealed	680	200	10
		Quenched and tempered	1100	325	11
M	Stainless steel and cast steel	Ferritic / martensitic	680	200	12
		Martensitic	820	240	13
		Austenitic	600	180	14
K	Gray cast iron (GG)	Ferritic		160	15
		Pearlitic		250	16
	Cast iron nodular (GGG)	Ferritic		180	17
		Pearlitic		260	18
	Malleable cast iron	Ferritic		130	19
N	Aluminum - Wrought alloy	Not cureable		60	21
		Cured		100	22
	Aluminum-cast, alloyed	≤12% Si Not cureable		75	23
		Cured		90	24
		>12% Si High temp.		130	25
	Copper alloys	>1% Pb Free cutting		110	26
		Brass		90	27
		Electrolitic copper		100	28
	Non-metallic	Duroplastics, fiber plastics		70 Shore D	29
		Hard rubber		55 Shore D	30
S	High temp. alloys	Fe based Annealed		200	31
				280	32
		Ni or Co based Annealed		250	33
				350	34
				320	35
	Titanium, Ti alloys	Pure	Rm 400	190	36
		Alpha+beta alloys cured	Rm 1050	310	37
H	Hardened steel	Hardened		55HRC	38
		Hardened		60HRC	39
	Chilled cast iron	Cast		400	40
	Cast iron nodular	Hardened		55HRC	41

► For more information of material groups, see the materials & grades "material conversion table"

■ Steel
 ■ Stainless steel
 ■ Cast iron
 ■ Nonferrous
 ■ High temp. alloys
 ■ Hardened steel

Recommended Cutting Conditions




Machining data for thread turning insert


Cutting speed (m/min)					
Coated			Uncoated		
TT7010	TT9030	TT8010	P30		
120-200	140-220	85-125	80-120		
120-200	140-220	85-125	80-120		
110-190	130-210	80-120	70-110		
110-190	130-210	80-120	70-110		
90-170	110-190	70-100	65-95		
70-120	70-120	50-70	70-110		
90-170	110-190	70-100	65-95		
80-120	100-140	60-100	70-110		
70-120	90-140	40-80	40-80		
70-100	70-100	40-70	40-70		
40-80	40-80	40-70	40-70		
85-125	90-130	40-70	40-70		
120-180	130-190	80-120	80-120		
50-100	60-110	40-60	40-60		
	100-140	80-120			
	110-150	80-120			
	110-150	80-120			
	80-120	80-120			
	110-150	60-100			
	80-120	55-95			
	1300-1500	700-900			
	400-600	330-430			
	500-800	350-450			
	370-470	300-360			
	200-280	150-210			
	260-340	160-240			
	350-450	250-310			
	100-140	80-120			
	250-350	160-200			
	250-350	150-210			
	50-70	20-50			
	30-50	20-50			
	30-50	20-40			
	20-40	15-30			
	20-40	15-30			
	120-140	90-110			
	40-60	20-50			
	30-60	20-35			
	20-40	20-30			
	20-40	20-30			
	20-30	15-25			

▶ Thread helix angle and anvil selection

■ Helix angle λ evaluation

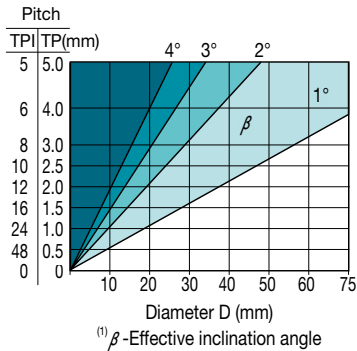


$$\operatorname{tg} \lambda = \frac{1 \times \text{TP}}{3.14 \cdot D}$$
$$\lambda^{\circ} = \frac{20 \times \text{TP}}{D}$$




TP - Thread pitch (mm)
D - Effective diameter of thread (mm)
λ - Angle of inclination

▶ Anvil selection according to thread helix angle λ

Standard									
Thread helix angle λ		> 4°	3° - 4°	2° - 3°	1° - 2°	0° - 1°	Negative anvils		
Inclination angle β		4.5°	3.5°	2.5°	1.5°	0.5°	-0.5°	-1.5°	
INSL(C)	Toolholder	Anvil designation							
16	EX RH OR IN LH	AE 16 +4.5	AE 16 +3.5	AE 16 +2.5	AE 16	AE 16 +0.5	AE 16 -0.5	AE 16 -1.5	
(3/8)	EX LH OR IN RH	AI 16 +4.5	AI 16 +3.5	AI 16 +2.5	AI 16	AI 16 +0.5	AI 16 -0.5	AI 16 -1.5	
22	EX RH OR IN LH	AE 22 +4.5	AE 22 +3.5	AE 22 +2.5	AE 22	AE 22 +0.5	AE 22 -0.5	AE 22 -1.5	
(1/2)	EX LH OR IN RH	AI 22 +4.5	AI 22 +3.5	AI 22 +2.5	AI 22	AI 22 +0.5	AI 22 -0.5	AI 22 -1.5	
27	EX RH OR IN LH	AE 27 +4.5	AE 27 +3.5	AE 27 +2.5	AE 27	AE 27 +0.5	AE 27 -0.5	AE 27 -1.5	
(5/8)	EX LH OR IN RH	AI 27 +4.5	AI 27 +3.5	AI 27 +2.5	AI 27	AI 27 +0.5	AI 27 -0.5	AI 27 -1.5	
22U	EX RH OR IN LH	AE 22U +4.5	AE 22U +3.5	AE 22U +2.5	AE 22U	AE 22U +0.5	AE 22U -0.5	AE 22U -1.5	
(1/2U)	EX LH OR IN RH	AI 22U +4.5	AI 22U +3.5	AI 22U +2.5	AI 22U	AI 22U +0.5	AI 22U -0.5	AI 22U -1.5	
27U	EX RH OR IN LH	AE 27U +4.5	AE 27U +3.5	AE 27U +2.5	AE 27U	AE 27U +0.5	AE 27U -0.5	AE 27U -1.5	
(5/8U)	EX LH OR IN RH	AI 27U +4.5	AI 27U +3.5	AI 27U +2.5	AI 27U	AI 27U +0.5	AI 27U -0.5	AI 27U -1.5	

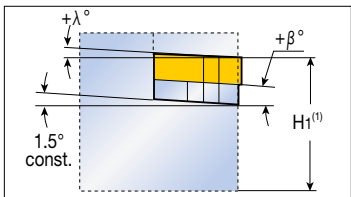



- Anvils for positive inclination angle β applicable when turning
- RH thread with RH holder or LH thread with LH holder

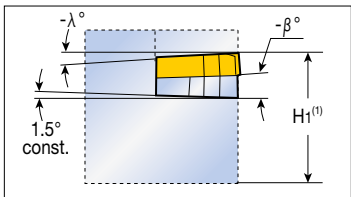


- Anvils for negative inclination β used when turning
- RH thread with LH holder or LH thread with RH holder

▶ ⁽¹⁾ H1 remains constant for every anvil combination.

► Anvil selection according to thread helix angle λ

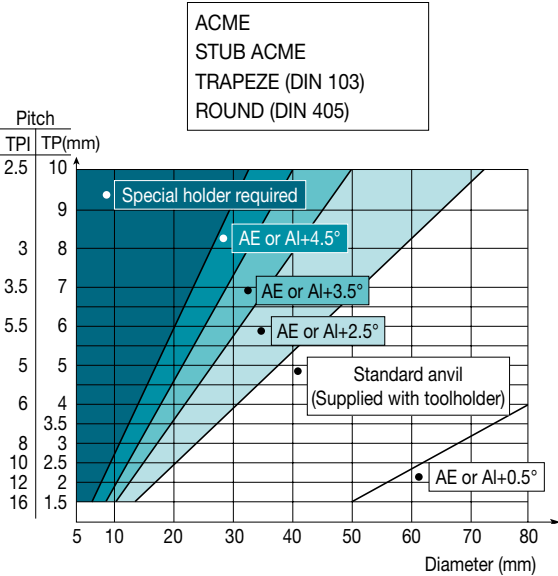

AE anvils : EX-RH and IN-LH toolholders
AI anvils : IN-RH and EX-LH toolholders

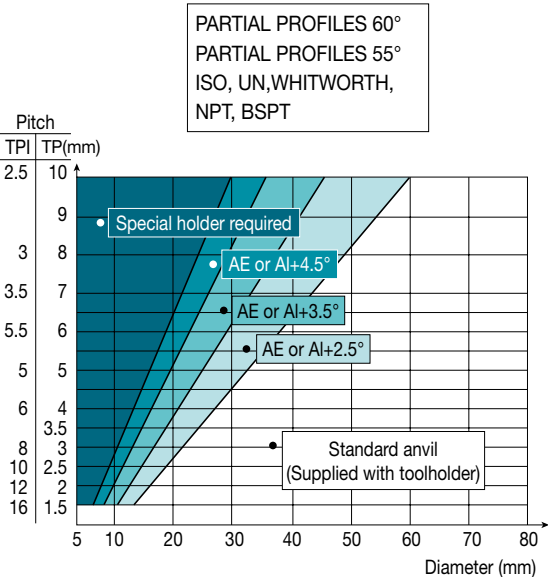

AE anvils : EX-RH and IN-LH toolholders
AI anvils : IN-RH and EX-LH toolholders

► Maximum depth of first cut for CNC control / external threading - M-type inserts

Full profile	Pitch		Insert designation	No. of passes		Max. depth for first pass (D1) mm	
	TP (mm)	TPI		Min.	Max.	Low carbon steel	
						Eq. ⁽²⁾	Dim. ⁽³⁾
ISO metric	1.00		16 ERM 1.00 ISO	5	9	0.34	0.51
	1.25		16 ERM 1.25 ISO	6	11	0.42	0.63
	1.50		16 ERM 1.50 ISO	6	12	0.46	0.69
	1.75		16 ERM 1.75 ISO	8	13	0.48	0.72
	2.00		16 ERM 2.00 ISO	8	14	0.50	0.75
	2.50		16 ERM 2.50 ISO	10	15	0.53	0.80
	3.00		16 ERM 3.00 ISO	12	17	0.56	0.84
American UN		24	16 ERM 24 UN	5	9	0.34	0.51
		20	16 ERM 20 UN	6	10	0.42	0.63
		18	16 ERM 18 UN	6	11	0.46	0.69
		16	16 ERM 16 UN	7	12	0.47	0.71
		14	16 ERM 14 UN	6	13	0.46	0.69
		12	16 ERM 12 UN	8	14	0.50	0.75
		8	16 ERM 8 UN	12	17	0.56	0.84
British BSW		19	16 ERM 19 W	6	11	0.35	0.52
		16	16 ERM 16 W	7	12	0.47	0.71
		14	16 ERM 14 W	8	13	0.50	0.75
		11	16 ERM 11 W	9	14	0.44	0.66
NPT		18	16 ERM 18 NPT	10	20	0.24	0.36
		14	16 ERM 14 NPT	13	26	0.24	0.36
		11.5	16 ERM 11.5 NPT	15	24	0.27	0.40
		8	16 ERM 8 NPT	17	30	0.31	0.46
Round		6	16 ERM 6 RND	9	20	0.42	0.63
Partial profile 60°		48-16	16 ERM A 60	(1)		0.22	0.33
		14-8	16 ERM G 60			0.50	0.75
		48-8	16 ERM AG 60			0.24	0.36
		7-5	16 ERM N 60			0.41	0.62
Partial profile 55°		14-8	16 ERM G 55			0.50	0.75
		48-8	16 ERM AG 55			0.22	0.33

► ⁽¹⁾ As per the number of passes for the relevant pitch

⁽²⁾ Equal depth of cut method

⁽³⁾ Diminished depth of cut for each pass method

Max. depth for first pass (D1) mm							
High carbon steel		Alloy steel		Stainless steel		Nonferrous aluminum	
Eq. ⁽²⁾	Dim. ⁽³⁾	Eq. ⁽²⁾	Dim. ⁽³⁾	Eq. ⁽²⁾	Dim. ⁽³⁾	Eq. ⁽²⁾	Dim. ⁽³⁾
0.31	0.46	0.27	0.41	0.22	0.33	0.48	0.71
0.38	0.57	0.34	0.50	0.27	0.41	0.59	0.88
0.41	0.62	0.37	0.55	0.30	0.45	0.64	0.97
0.43	0.65	0.38	0.58	0.31	0.47	0.67	1.01
0.45	0.68	0.40	0.60	0.33	0.49	0.70	1.05
0.48	0.72	0.42	0.64	0.34	0.52	0.74	1.12
0.50	0.76	0.45	0.67	0.36	0.55	0.78	1.18
0.31	0.46	0.27	0.41	0.22	0.33	0.48	0.71
0.38	0.57	0.34	0.50	0.27	0.41	0.59	0.88
0.41	0.62	0.37	0.55	0.30	0.45	0.64	0.97
0.42	0.64	0.38	0.57	0.31	0.46	0.66	0.99
0.41	0.62	0.37	0.55	0.28	0.41	0.64	0.97
0.45	0.68	0.40	0.60	0.33	0.49	0.70	1.05
0.50	0.76	0.45	0.67	0.36	0.55	0.78	1.18
0.32	0.47	0.28	0.42	0.21	0.31	0.49	0.73
0.42	0.64	0.38	0.57	0.31	0.46	0.66	0.99
0.45	0.68	0.40	0.60	0.33	0.49	0.70	1.05
0.40	0.59	0.35	0.53	0.29	0.43	0.62	0.92
0.22	0.32	0.19	0.29	0.16	0.23	0.34	0.50
0.22	0.32	0.19	0.29	0.14	0.22	0.34	0.50
0.24	0.36	0.22	0.32	0.18	0.26	0.38	0.56
0.28	0.41	0.25	0.37	0.20	0.30	0.43	0.64
0.38	0.57	0.34	0.50	0.27	0.41	0.59	0.88
0.20	0.30	0.18	0.26	0.14	0.21	0.31	0.46
0.45	0.68	0.40	0.60	0.33	0.49	0.70	1.05
0.22	0.32	0.19	0.29	0.16	0.23	0.34	0.50
0.37	0.56	0.33	0.50	0.27	0.40	0.57	0.87
0.45	0.68	0.40	0.60	0.33	0.49	0.70	1.05
0.20	0.30	0.18	0.26	0.14	0.21	0.31	0.46

► Maximum depth of first cut for CNC control / internal threading - M-type inserts

Full profile	Pitch		Insert designation	No. of passes		Max. depth for first pass (D1) mm	
	TP (mm)	TPI		Min.	Max.	Low carbon steel	
						Eq. ⁽²⁾	Dim. ⁽³⁾
ISO metric	1.50		11 IRM 1.50 ISO	10	20	0.20	0.30
	1.00		16 IRM 1.00 ISO	9	16	0.14	0.20
	1.25		16 IRM 1.25 ISO	9	16	0.19	0.28
	1.50		16 IRM 1.50 ISO	10	20	0.20	0.30
	1.75		16 IRM 1.75 ISO	11	18	0.21	0.32
	2.00		16 IRM 2.00 ISO	12	21	0.22	0.33
	2.50		16 IRM 2.50 ISO	14	21	0.23	0.34
	3.00		16 IRM 3.00 ISO	16	22	0.24	0.35
American UN		20	16 IRM 20 UN	7	13	0.20	0.30
		18	16 IRM 18 UN	8	15	0.20	0.30
		16	16 IRM 16 UN	11	19	0.20	0.30
		14	16 IRM 14 UN	11	20	0.21	0.31
		12	16 IRM 12 UN	12	21	0.23	0.34
		8	16 IRM 8 UN	14	20	0.24	0.36
British BSW		19	16 IRM 19 W	7	12	0.28	0.42
		16	16 IRM 16 W	9	14	0.26	0.39
		14	16 IRM 14 W	10	16	0.27	0.41
		11	16 IRM 11 W	12	19	0.31	0.46
NPT		14	16 IRM 14 NPT	21	35	0.13	0.20
		11.5	16 IRM 11.5 NPT	21	33	0.17	0.25
		8	16 IRM 8 NPT	20	34	0.23	0.34
Round		6	16 IRM 6 RND	12	24	0.30	0.46
Partial profile 60°		48-16	06 IRM A 60	(1)		0.22	0.33
		48-16	08 IRM A 60			0.13	0.20
		48-16	11 IRM A 60			0.13	0.20
		48-16	16 IRM A 60			0.13	0.20
		14-8	16 IRM G 60			0.22	0.33
		48-8	16 IRM AG 60			0.14	0.21
		7-5	22 IRM N 60			0.23	0.34
Partial profile 55°		14-8	16 IRM G 55			0.34	0.50
		48-8	16 IRM AG 55			0.14	0.20

► ⁽¹⁾ As per the number of passes for the relevant pitch

⁽²⁾ Equal depth of cut method

⁽³⁾ Diminished depth of cut for each pass method

► Number of cutting passes for regular type inserts

Pitch	TP (mm)	0.5	1.0	1.5	2.0	2.5	3.0	4.0	6.0
	TPI	48	24	16	12	10	8	6	4
Number of passes		4-6	5-9	5-12	6-14	7-15	8-17	10-20	11-22

► For mini-tools (06IR or 08IR) add 1-3 passes. Increase for hard materials

Max. depth for first pass (D1) mm							
High carbon steel		Alloy steel		Stainless steel		Nonferrous aluminum	
Eq. ⁽²⁾	Dim. ⁽³⁾	Eq. ⁽²⁾	Dim. ⁽³⁾	Eq. ⁽²⁾	Dim. ⁽³⁾	Eq. ⁽²⁾	Dim. ⁽³⁾
0.18	0.27	0.16	0.24	0.12	0.18	0.28	0.42
0.13	0.18	0.11	0.16	0.09	0.13	0.20	0.28
0.17	0.25	0.15	0.22	0.12	0.18	0.27	0.39
0.18	0.27	0.16	0.24	0.12	0.18	0.28	0.42
0.19	0.29	0.17	0.26	0.14	0.21	0.29	0.45
0.20	0.30	0.18	0.26	0.14	0.21	0.31	0.46
0.21	0.31	0.18	0.27	0.15	0.22	0.32	0.48
0.22	0.32	0.19	0.29	0.16	0.23	0.34	0.50
0.18	0.27	0.16	0.24	0.12	0.18	0.28	0.42
0.18	0.27	0.16	0.24	0.12	0.18	0.28	0.42
0.18	0.27	0.16	0.24	0.13	0.20	0.28	0.42
0.19	0.28	0.17	0.25	0.13	0.19	0.29	0.43
0.21	0.31	0.18	0.27	0.15	0.22	0.32	0.48
0.22	0.32	0.19	0.29	0.16	0.23	0.34	0.50
0.25	0.38	0.22	0.34	0.17	0.25	0.39	0.59
0.23	0.35	0.21	0.31	0.17	0.25	0.36	0.55
0.24	0.37	0.22	0.33	0.18	0.27	0.38	0.57
0.28	0.41	0.25	0.37	0.20	0.30	0.43	0.64
0.12	0.18	0.10	0.16	0.08	0.12	0.18	0.28
0.15	0.23	0.14	0.20	0.11	0.16	0.24	0.35
0.21	0.31	0.18	0.27	0.14	0.20	0.32	0.48
0.27	0.41	0.24	0.37	0.20	0.30	0.42	0.64
0.20	0.30	0.18	0.26	0.14	0.21	0.31	0.46
0.12	0.18	0.10	0.16	0.08	0.13	0.18	0.28
0.12	0.18	0.10	0.16	0.08	0.13	0.18	0.28
0.12	0.18	0.10	0.16	0.08	0.13	0.18	0.28
0.20	0.30	0.18	0.26	0.14	0.21	0.31	0.46
0.13	0.19	0.11	0.17	0.09	0.14	0.20	0.29
0.21	0.31	0.18	0.27	0.15	0.22	0.32	0.48
0.31	0.45	0.27	0.40	0.22	0.33	0.48	0.70
0.13	0.18	0.11	0.16	0.09	0.13	0.20	0.28

► Recommended number of passes for multi-tooth insert

Full profile	Insert description	No. of passes	1 st pass	2 nd pass	3 rd pass	4 th pass	External / internal
ISO metric	16 ER 1.0 ISO 3M	2	0.39	0.24	-	-	External
	16 ER 1.5 ISO 2M	3	0.40	0.31	0.21	-	External
	22 ER 1.5 ISO 3M	2	0.54	0.38	-	-	External
	22 ER 2.0 ISO 2M	3	0.56	0.42	0.27	-	External
	22 ER 2.0 ISO 3M	2	0.75	0.50	-	-	External
	27 ER 3.0 ISO 2M	4	0.60	0.52	0.44	0.30	External
	16 IR 1.0 ISO 3M	2	0.32	0.26	-	-	Internal
	16 IR 1.5 ISO 2M	3	0.36	0.29	0.22	-	Internal
	22 IR 1.5 ISO 3M	2	0.49	0.38	-	-	Internal
	22 IR 2.0 ISO 2M	3	0.50	0.40	0.25	-	Internal
UN	22 IR 2.0 ISO 3M	2	0.72	0.43	-	-	Internal
	27 IR 3.0 ISO 2M	4	0.57	0.45	0.38	0.33	Internal
	16 ER 16 UN 2M	3	0.45	0.32	0.20	-	External
	22 ER 16 UN 3M	2	0.60	0.37	-	-	External
	22 ER 12 UN 2M	3	0.60	0.39	0.31	-	External
	22 ER 12 UN 3M	2	0.80	0.50	-	-	External
	27 ER 8 UN 2M	4	0.63	0.55	0.42	0.36	External
	16 IR 16 UN 2M	3	0.40	0.29	0.23	-	Internal
	22 IR 16 UN 3M	2	0.57	0.35	-	-	Internal
	22 IR 12 UN 2M	3	0.55	0.39	0.28	-	Internal
NPT	22 IR 12 UN 3M	2	0.75	0.47	-	-	Internal
	27 IR 8 UN 2M	4	0.65	0.49	0.42	0.27	Internal
	22 ER 11.5 NPT 2M	4	0.55	0.46	0.35	0.32	External
	27 ER 11.5 NPT 3M	3	0.75	0.57	0.36	-	External
	27 ER 8 NPT 2M	4	0.80	0.62	0.54	0.45	External
	22 IR 11.5 NPT 2M	4	0.55	0.46	0.35	0.32	Internal
	27 IR 11.5 NPT 3M	3	0.75	0.57	0.36	-	Internal
Whitworth	27 IR 8 NPT 2M	4	0.80	0.62	0.54	0.45	Internal
	16 ER 14 W 2M	3	0.51	0.39	0.26	-	External
	22 ER 14 W 3M	2	0.72	0.44	-	-	External
	22 ER 11 W 2M	3	0.65	0.46	0.37	-	External
	16 IR 14 W 2M	3	0.51	0.39	0.26	-	Internal
	22 IR 14 W 3M	2	0.72	0.44	-	-	Internal
	22 IR 11 W 2M	3	0.65	0.46	0.37	-	Internal
API round	22 ER 10 API RD 2M	3	0.58	0.53	0.30	-	External
	27 ER 10 API RD 3M	2	0.98	0.43	-	-	External
	27 ER 8 API RD 2M	3	0.82	0.59	0.40	-	External
	22 IR 10 API RD 2M	3	0.58	0.53	0.30	-	Internal
	27 IR 10 API RD 3M	2	0.98	0.43	-	-	Internal
	27 IR 8 API RD 2M	3	0.82	0.59	0.40	-	Internal