



01245 260414 - 250910



[sales@smarttoolsuk.com](mailto:sales@smarttoolsuk.com)



[www.smarttoolsuk.com](http://www.smarttoolsuk.com)

TiN-coated HSS-E precision drills

# EX-(SUS) SERIES



# KEY FEATURES: EX-SUS SERIES



● EX-SUS-GDR  
485 sizes increments of 0.01 from 2.0-6.0mm

● EX-SUS-GDS  
Wide variety of 'in-between' sizes  
635 sizes, increments of 0.01 from 0.5-6.0mm

① High performance in stainless steels, low carbon steels, copper, (cast) aluminium

② Vanadium HSS substrate + TiN coating

③ Superior toughness, durability & value for money when coolant-through supply is not possible

④ No center drills needed

# RECOMMENDED WORK MATERIALS

The EX-SUS-GDS & EX-SUS-GDR drill line is famous worldwide for its incredible performance in gummy materials like stainless steel. Its high helix and refined X-thinning point geometry yield incredible sharpness which make it the ideal solution for processing soft materials. Available in stub and jobber lengths and in diameter increments of every 0.01 mm.

- No center drills needed. Achieves high accuracy high shearing forces ideal in gummy materials.
- Added heat resistance via 3% Vanadium content yields superior performance to standard High Speed Steel drills.
- Increased hardness and lubricity increases wear resistance thereby extending tool life.
- Over 1.100 sizes available from stock, with diameter tolerances that can replace reaming operations

## Applications

- Aluminum Alloy, Cast Aluminum, Low Carbon Steel, **Stainless Steel.**
- In applications where internal coolant supply is not possible the EX-SUS drill is the absolute most cost-effective solution for Stainless Steel.
- Any drilling application where you cannot locate an “in-between” diameter size in anyone else’s drill offering.


	EX-SUS-GDS/GDR 	EX-GDS 	EX-GDR 
Low carbon steel	⊙	○	○
Medium carbon steel	○	⊙	⊙
High carbon steel		⊙	⊙
Alloys steels		⊙	⊙
~35 HRC		⊙	○
35~45 HRC		⊙ / ○*	
45~50 HRC			
50~70 HRC			
Stainless	⊙		
Tool steel		⊙ / ○*	⊙
Cast iron		⊙	⊙
Ductile cast iron		○	○
Copper	⊙		
Aluminium	⊙		○
Alu alloy casting	○	○	○
Titanium alloy			
Inconel		○	
Magnesium alloy		○	○

⊙ Recommended ○ Good \* Drilling depth 3D~4D



# EX-SUS-GDS

Drilling | HSS | 3xD

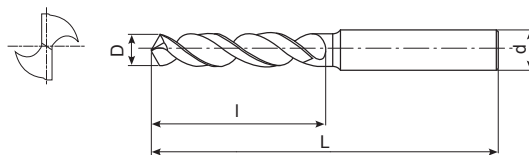

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments



Drilling | HSS

3xD

EDP	D	L	l	d
61505	0,5	38	3	3
8595051	0,51	38	3	3
8595052	0,52	38	3	3
8595053	0,53	38	3	3
8595054	0,54	38	3,5	3
8595055	0,55	38	3,5	3
8595056	0,56	38	3,5	3
8595057	0,57	38	3,5	3
8595058	0,58	38	3,5	3
8595059	0,59	38	3,5	3
61506	0,6	38	3,5	3
8595061	0,61	38	4	3
8595062	0,62	38	4	3
8595063	0,63	38	4	3
8595064	0,64	38	4	3
8595065	0,65	38	4	3
8595066	0,66	38	4	3
8595067	0,67	38	4	3
8595068	0,68	38	4,5	3
8595069	0,69	38	4,5	3
61507	0,7	38	4,5	3
8595071	0,71	38	4,5	3
8595072	0,72	38	4,5	3
8595073	0,73	38	4,5	3
8595074	0,74	38	4,5	3
8595075	0,75	38	4,5	3
8595076	0,76	38	5	3
8595077	0,77	38	5	3
8595078	0,78	38	5	3
8595079	0,79	38	5	3
61508	0,8	38	5	3
8595081	0,81	38	5	3
8595082	0,82	38	5	3
8595083	0,83	38	5	3
8595084	0,84	38	5	3
8595085	0,85	38	5	3
8595086	0,86	38	5,5	3
8595087	0,87	38	5,5	3
8595088	0,88	38	5,5	3
8595089	0,89	38	5,5	3
61509	0,9	38	5,5	3
8595091	0,91	38	5,5	3
8595092	0,92	38	5,5	3
8595093	0,93	38	5,5	3
8595094	0,94	38	5,5	3


EDP	D	L	l	d
8595095	0,95	38	6	3
8595096	0,96	38	6	3
8595097	0,97	38	6	3
8595098	0,98	38	6	3
8595099	0,99	38	6	3
61510	1	38	6	3
8595101	1,01	38	6	3
8595102	1,02	38	6	3
8595103	1,03	38	6	3
8595104	1,04	38	6	3
8595105	1,05	38	6	3
8595106	1,06	38	6	3
8595107	1,07	39	7	3
8595108	1,08	39	7	3
8595109	1,09	39	7	3
61511	1,1	39	7	3
8595111	1,11	39	7	3
8595112	1,12	39	7	3
8595113	1,13	39	7	3
8595114	1,14	39	7	3
8595115	1,15	39	7	3
8595116	1,16	39	7	3
8595117	1,17	39	7	3
8595118	1,18	39	7	3
8595119	1,19	40	8	3
61512	1,2	40	8	3
8595121	1,21	40	8	3
8595122	1,22	40	8	3
8595123	1,23	40	8	3
8595124	1,24	40	8	3
8595125	1,25	40	8	3
8595126	1,26	40	8	3
8595127	1,27	40	8	3
8595128	1,28	40	8	3
8595129	1,29	40	8	3
61513	1,3	40	8	3
8595131	1,31	40	8	3
8595132	1,32	40	8	3
8595133	1,33	41	8	3
8595134	1,34	41	8	3
8595135	1,35	41	8	3
8595136	1,36	41	8	3
8595137	1,37	41	9	3
8595138	1,38	41	9	3
8595139	1,39	41	9	3





# EX-SUS-GDS

Drilling | HSS | 3xD

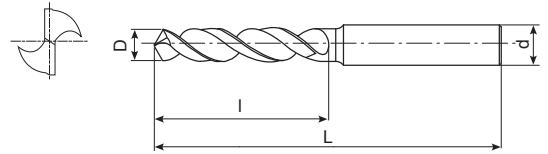

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments



EDP	D	L	l	d
61514	1,4	41	9	3
8595141	1,41	41	9	3
8595142	1,42	41	9	3
8595143	1,43	41	9	3
8595144	1,44	41	9	3
8595145	1,45	41	9	3
8595146	1,46	41	9	3
8595147	1,47	41	9	3
8595148	1,48	41	9	3
8595149	1,49	41	9	3
61515	1,5	41	9	3
8595151	1,51	42	10	3
8595152	1,52	42	10	3
8595153	1,53	42	10	3
8595154	1,54	42	10	3
8595155	1,55	42	10	3
8595156	1,56	42	10	3
8595157	1,57	42	10	3
8595158	1,58	42	10	3
8595159	1,59	42	10	3
61516	1,6	42	10	3
8595161	1,61	42	10	3
8595162	1,62	42	10	3
8595163	1,63	42	10	3
8595164	1,64	42	10	3
8595165	1,65	42	10	3
8595166	1,66	42	10	3
8595167	1,67	42	10	3
8595168	1,68	42	10	3
8595169	1,69	42	10	3
61517	1,7	42	10	3
8595171	1,71	43	11	3
8595172	1,72	43	11	3
8595173	1,73	43	11	3
8595174	1,74	43	11	3
8595175	1,75	43	11	3
8595176	1,76	43	11	3
8595177	1,77	43	11	3
8595178	1,78	43	11	3
8595179	1,79	43	11	3
61518	1,8	43	11	3
8595181	1,81	43	11	3
8595182	1,82	43	11	3
8595183	1,83	43	11	3
8595184	1,84	43	11	3

EDP	D	L	l	d
8595185	1,85	43	11	3
8595186	1,86	43	11	3
8595187	1,87	43	11	3
8595188	1,88	43	11	3
8595189	1,89	43	11	3
61519	1,9	43	11	3
8595191	1,91	44	12	3
8595192	1,92	44	12	3
8595193	1,93	44	12	3
8595194	1,94	44	12	3
8595195	1,95	44	12	3
8595196	1,96	44	12	3
8595197	1,97	44	12	3
8595198	1,98	44	12	3
8595199	1,99	44	12	3
61520	2	44	12	3
8595201	2,01	44	12	3
8595202	2,02	44	12	3
8595203	2,03	44	12	3
8595204	2,04	44	12	3
8595205	2,05	44	12	3
8595206	2,06	44	12	3
8595207	2,07	44	12	3
8595208	2,08	44	12	3
8595209	2,09	44	12	3
61521	2,1	44	12	3
8595211	2,11	44	12	3
8595212	2,12	44	12	3
8595213	2,13	45	13	3
8595214	2,14	45	13	3
8595215	2,15	45	13	3
8595216	2,16	45	13	3
8595217	2,17	45	13	3
8595218	2,18	45	13	3
8595219	2,19	45	13	3
61522	2,2	45	13	3
8595221	2,21	45	13	3
8595222	2,22	45	13	3
8595223	2,23	45	13	3
8595224	2,24	45	13	3
8595225	2,25	45	13	3
8595226	2,26	45	13	3
8595227	2,27	45	13	3
8595228	2,28	45	13	3
8595229	2,29	45	13	3

Drilling | HSS  
3xD



01245 260414 - 250910




sales@smarttoolsuk.com




www.smarttoolsuk.com

# EX-SUS-GDS

Drilling | HSS | 3xD

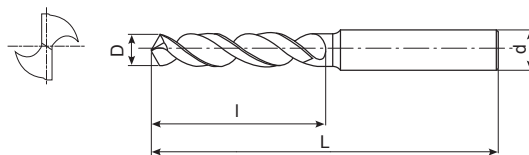

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments



Drilling | HSS

3xD


EDP	D	L	l	d
61523	2,3	45	13	3
8595231	2,31	45	13	3
8595232	2,32	45	13	3
8595233	2,33	45	13	3
8595234	2,34	45	13	3
8595235	2,35	45	13	3
8595236	2,36	45	13	3
8595237	2,37	46	14	3
8595238	2,38	46	14	3
8595239	2,39	46	14	3
61524	2,4	46	14	3
8595241	2,41	46	14	3
8595242	2,42	46	14	3
8595243	2,43	46	14	3
8595244	2,44	46	14	3
8595245	2,45	46	14	3
8595246	2,46	46	14	3
8595247	2,47	46	14	3
8595248	2,48	46	14	3
8595249	2,49	46	14	3
61525	2,5	46	14	3
8595251	2,51	46	14	3
8595252	2,52	46	14	3
8595253	2,53	46	14	3
8595254	2,54	46	14	3
8595255	2,55	46	14	3
8595256	2,56	46	14	3
8595257	2,57	46	14	3
8595258	2,58	46	14	3
8595259	2,59	46	14	3
61526	2,6	46	14	3
8595261	2,61	46	14	3
8595262	2,62	46	14	3
8595263	2,63	46	14	3
8595264	2,64	46	14	3
8595265	2,65	46	14	3
8595266	2,66	48	16	3
8595267	2,67	48	16	3
8595268	2,68	48	16	3
8595269	2,69	48	16	3
61527	2,7	48	16	3
8595271	2,71	48	16	3
8595272	2,72	48	16	3
8595273	2,73	48	16	3
8595274	2,74	48	16	3

EDP	D	L	l	d
8595275	2,75	48	16	3
8595276	2,76	48	16	3
8595277	2,77	48	16	3
8595278	2,78	48	16	3
8595279	2,79	48	16	3
61528	2,8	48	16	3
8595281	2,81	48	16	3
8595282	2,82	48	16	3
8595283	2,83	48	16	3
8595284	2,84	48	16	3
8595285	2,85	48	16	3
8595286	2,86	48	16	3
8595287	2,87	48	16	3
8595288	2,88	48	16	3
8595289	2,89	48	16	3
61529	2,9	48	16	3
8595291	2,91	48	16	3
8595292	2,92	48	16	3
8595293	2,93	48	16	3
8595294	2,94	48	16	3
8595295	2,95	48	16	3
8595296	2,96	48	16	3
8595297	2,97	48	16	3
8595298	2,98	48	16	3
8595299	2,99	48	16	3
61530	3	48	16	3
8595301	3,01	50	18	4
8595302	3,02	50	18	4
8595303	3,03	50	18	4
8595304	3,04	50	18	4
8595305	3,05	50	18	4
8595306	3,06	50	18	4
8595307	3,07	50	18	4
8595308	3,08	50	18	4
8595309	3,09	50	18	4
61531	3,1	50	18	4
8595311	3,11	50	18	4
8595312	3,12	50	18	4
8595313	3,13	50	18	4
8595314	3,14	50	18	4
8595315	3,15	50	18	4
8595316	3,16	50	18	4
8595317	3,17	50	18	4
8595318	3,18	50	18	4
8595319	3,19	50	18	4



# EX-SUS-GDS

Drilling | HSS | 3xD

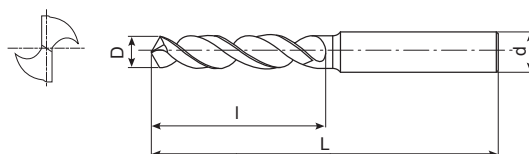

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments

<b>P</b> C: ≤0,2%	<b>P</b> C: 0,25-0,4%	<b>M</b> INOX	<b>N</b> Al	<b>N</b> AC,ADC
----------------------	--------------------------	------------------	----------------	--------------------

HSSE	TiN	35°~40°	h7	D≤12	D>12	0,5≤D<1 150°	1≤D<2 140°	2≤D≤4 130°	4<D≤20 120°	h8	p.26
------	-----	---------	----	------	------	-----------------	---------------	---------------	----------------	----	------

EDP	D	L	l	d
61532	3,2	50	18	4
8595321	3,21	50	18	4
8595322	3,22	50	18	4
8595323	3,23	50	18	4
8595324	3,24	50	18	4
8595325	3,25	50	18	4
8595326	3,26	50	18	4
8595327	3,27	50	18	4
8595328	3,28	50	18	4
8595329	3,29	50	18	4
61533	3,3	50	18	4
8595331	3,31	50	18	4
8595332	3,32	50	18	4
8595333	3,33	50	18	4
8595334	3,34	50	18	4
8595335	3,35	50	18	4
8595336	3,36	52	20	4
8595337	3,37	52	20	4
8595338	3,38	52	20	4
8595339	3,39	52	20	4
61534	3,4	52	20	4
8595341	3,41	52	20	4
8595342	3,42	52	20	4
8595343	3,43	52	20	4
8595344	3,44	52	20	4
8595345	3,45	52	20	4
8595346	3,46	52	20	4
8595347	3,47	52	20	4
8595348	3,48	52	20	4
8595349	3,49	52	20	4
61535	3,5	52	20	4
8595351	3,51	52	20	4
8595352	3,52	52	20	4
8595353	3,53	52	20	4
8595354	3,54	52	20	4
8595355	3,55	52	20	4
8595356	3,56	52	20	4
8595357	3,57	52	20	4
8595358	3,58	52	20	4
8595359	3,59	52	20	4
61536	3,6	52	20	4
8595361	3,61	52	20	4
8595362	3,62	52	20	4
8595363	3,63	52	20	4
8595364	3,64	52	20	4

EDP	D	L	l	d
8595365	3,65	52	20	4
8595366	3,66	52	20	4
8595367	3,67	52	20	4
8595368	3,68	52	20	4
8595369	3,69	52	20	4
61537	3,7	52	20	4
8595371	3,71	52	20	4
8595372	3,72	52	20	4
8595373	3,73	52	20	4
8595374	3,74	52	20	4
8595375	3,75	52	20	4
8595376	3,76	54	22	4
8595377	3,77	54	22	4
8595378	3,78	54	22	4
8595379	3,79	54	22	4
61538	3,8	54	22	4
8595381	3,81	54	22	4
8595382	3,82	54	22	4
8595383	3,83	54	22	4
8595384	3,84	54	22	4
8595385	3,85	54	22	4
8595386	3,86	54	22	4
8595387	3,87	54	22	4
8595388	3,88	54	22	4
8595389	3,89	54	22	4
61539	3,9	54	22	4
8595391	3,91	54	22	4
8595392	3,92	54	22	4
8595393	3,93	54	22	4
8595394	3,94	54	22	4
8595395	3,95	54	22	4
8595396	3,96	54	22	4
8595397	3,97	54	22	4
8595398	3,98	54	22	4
8595399	3,99	54	22	4
61540	4	54	22	4
8595401	4,01	66	22	6
8595402	4,02	66	22	6
8595403	4,03	66	22	6
8595404	4,04	66	22	6
8595405	4,05	66	22	6
8595406	4,06	66	22	6
8595407	4,07	66	22	6
8595408	4,08	66	22	6
8595409	4,09	66	22	6

Drilling | HSS  
3xD



01245 260414 - 250910




sales@smarttoolsuk.com



www.smarttoolsuk.com

# EX-SUS-GDS

Drilling | HSS | 3xD

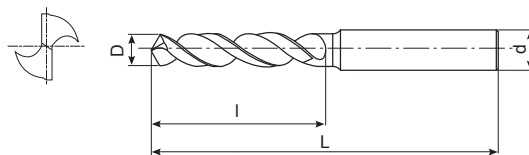

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments

<b>P</b> C: ≤0,2%	<b>P</b> C: 0,25-0,4%	<b>M</b> INOX	<b>N</b> Al	<b>N</b> AC,ADC
----------------------	--------------------------	------------------	----------------	--------------------

HSSE	TiN	35°~40°	h7	D≤12	D>12	0,5≤D<1 150°	1≤D<2 140°	2≤D≤4 130°	4<D≤20 120°	h8	p.26
------	-----	---------	----	------	------	-----------------	---------------	---------------	----------------	----	------

Drilling | HSS

3xD


EDP	D	L	l	d
61541	4,1	66	22	6
8595411	4,11	66	22	6
8595412	4,12	66	22	6
8595413	4,13	66	22	6
8595414	4,14	66	22	6
8595415	4,15	66	22	6
8595416	4,16	66	22	6
8595417	4,17	66	22	6
8595418	4,18	66	22	6
8595419	4,19	66	22	6
61542	4,2	66	22	6
8595421	4,21	66	22	6
8595422	4,22	66	22	6
8595423	4,23	66	22	6
8595424	4,24	66	22	6
8595425	4,25	66	22	6
8595426	4,26	68	24	6
8595427	4,27	68	24	6
8595428	4,28	68	24	6
8595429	4,29	68	24	6
61543	4,3	68	24	6
8595431	4,31	68	24	6
8595432	4,32	68	24	6
8595433	4,33	68	24	6
8595434	4,34	68	24	6
8595435	4,35	68	24	6
8595436	4,36	68	24	6
8595437	4,37	68	24	6
8595438	4,38	68	24	6
8595439	4,39	68	24	6
61544	4,4	68	24	6
8595441	4,41	68	24	6
8595442	4,42	68	24	6
8595443	4,43	68	24	6
8595444	4,44	68	24	6
8595445	4,45	68	24	6
8595446	4,46	68	24	6
8595447	4,47	68	24	6
8595448	4,48	68	24	6
8595449	4,49	68	24	6
61545	4,5	68	24	6
8595451	4,51	68	24	6
8595452	4,52	68	24	6
8595453	4,53	68	24	6
8595454	4,54	68	24	6

EDP	D	L	l	d
8595455	4,55	68	24	6
8595456	4,56	68	24	6
8595457	4,57	68	24	6
8595458	4,58	68	24	6
8595459	4,59	68	24	6
61546	4,6	68	24	6
8595461	4,61	68	24	6
8595462	4,62	68	24	6
8595463	4,63	68	24	6
8595464	4,64	68	24	6
8595465	4,65	68	24	6
8595466	4,66	68	24	6
8595467	4,67	68	24	6
8595468	4,68	68	24	6
8595469	4,69	68	24	6
61547	4,7	68	24	6
8595471	4,71	68	24	6
8595472	4,72	68	24	6
8595473	4,73	68	24	6
8595474	4,74	68	24	6
8595475	4,75	68	24	6
8595476	4,76	70	26	6
8595477	4,77	70	26	6
8595478	4,78	70	26	6
8595479	4,79	70	26	6
61548	4,8	70	26	6
8595481	4,81	70	26	6
8595482	4,82	70	26	6
8595483	4,83	70	26	6
8595484	4,84	70	26	6
8595485	4,85	70	26	6
8595486	4,86	70	26	6
8595487	4,87	70	26	6
8595488	4,88	70	26	6
8595489	4,89	70	26	6
61549	4,9	70	26	6
8595491	4,91	70	26	6
8595492	4,92	70	26	6
8595493	4,93	70	26	6
8595494	4,94	70	26	6
8595495	4,95	70	26	6
8595496	4,96	70	26	6
8595497	4,97	70	26	6
8595498	4,98	70	26	6
8595499	4,99	70	26	6




# EX-SUS-GDS

Drilling | HSS | 3xD

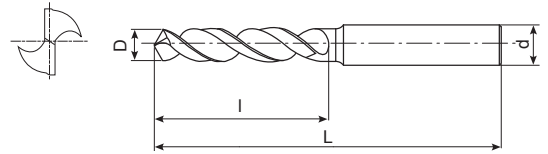

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments



EDP	D	L	l	d
61550	5	70	26	6
8595501	5,01	70	26	6
8595502	5,02	70	26	6
8595503	5,03	70	26	6
8595504	5,04	70	26	6
8595505	5,05	70	26	6
8595506	5,06	70	26	6
8595507	5,07	70	26	6
8595508	5,08	70	26	6
8595509	5,09	70	26	6
61551	5,1	70	26	6
8595511	5,11	70	26	6
8595512	5,12	70	26	6
8595513	5,13	70	26	6
8595514	5,14	70	26	6
8595515	5,15	70	26	6
8595516	5,16	70	26	6
8595517	5,17	70	26	6
8595518	5,18	70	26	6
8595519	5,19	70	26	6
61552	5,2	70	26	6
8595521	5,21	70	26	6
8595522	5,22	70	26	6
8595523	5,23	70	26	6
8595524	5,24	70	26	6
8595525	5,25	70	26	6
8595526	5,26	70	26	6
8595527	5,27	70	26	6
8595528	5,28	70	26	6
8595529	5,29	70	26	6
61553	5,3	70	26	6
8595531	5,31	72	28	6
8595532	5,32	72	28	6
8595533	5,33	72	28	6
8595534	5,34	72	28	6
8595535	5,35	72	28	6
8595536	5,36	72	28	6
8595537	5,37	72	28	6
8595538	5,38	72	28	6
8595539	5,39	72	28	6
61554	5,4	72	28	6
8595541	5,41	72	28	6
8595542	5,42	72	28	6
8595543	5,43	72	28	6
8595544	5,44	72	28	6

EDP	D	L	l	d
8595545	5,45	72	28	6
8595546	5,46	72	28	6
8595547	5,47	72	28	6
8595548	5,48	72	28	6
8595549	5,49	72	28	6
61555	5,5	72	28	6
8595551	5,51	72	28	6
8595552	5,52	72	28	6
8595553	5,53	72	28	6
8595554	5,54	72	28	6
8595555	5,55	72	28	6
8595556	5,56	72	28	6
8595557	5,57	72	28	6
8595558	5,58	72	28	6
8595559	5,59	72	28	6
61556	5,6	72	28	6
8595561	5,61	72	28	6
8595562	5,62	72	28	6
8595563	5,63	72	28	6
8595564	5,64	72	28	6
8595565	5,65	72	28	6
8595566	5,66	72	28	6
8595567	5,67	72	28	6
8595568	5,68	72	28	6
8595569	5,69	72	28	6
61557	5,7	72	28	6
8595571	5,71	72	28	6
8595572	5,72	72	28	6
8595573	5,73	72	28	6
8595574	5,74	72	28	6
8595575	5,75	72	28	6
8595576	5,76	72	28	6
8595577	5,77	72	28	6
8595578	5,78	72	28	6
8595579	5,79	72	28	6
61558	5,8	72	28	6
8595581	5,81	72	28	6
8595582	5,82	72	28	6
8595583	5,83	72	28	6
8595584	5,84	72	28	6
8595585	5,85	72	28	6
8595586	5,86	72	28	6
8595587	5,87	72	28	6
8595588	5,88	72	28	6
8595589	5,89	72	28	6

Drilling | HSS  
3xD



01245 260414 - 250910



sales@smarttoolsuk.com




www.smarttoolsuk.com



# EX-SUS-GDS

Drilling | HSS | 3xD

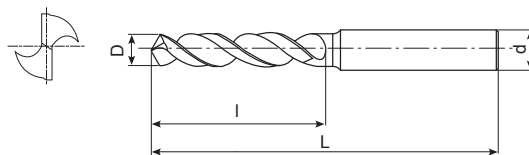

- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 3xD
- For stainless steel, low carbon steel and cast aluminium
- 635 sizes - from Ø 0,5-6 mm in 0,01 mm increments



Drilling | HSS

3xD

EDP	D	L	l	d
61559	5,9	72	28	6
8595591	5,91	72	28	6
8595592	5,92	72	28	6
8595593	5,93	72	28	6
8595594	5,94	72	28	6
8595595	5,95	72	28	6
8595596	5,96	72	28	6
8595597	5,97	72	28	6
8595598	5,98	72	28	6
8595599	5,99	72	28	6
61560	6	72	28	6
61561	6,1	75	31	8
61562	6,2	75	31	8
61563	6,3	75	31	8
61564	6,4	75	31	8
61565	6,5	75	31	8
61566	6,6	75	31	8
61567	6,7	75	31	8
61568	6,8	78	34	8
61569	6,9	78	34	8
61570	7	78	34	8
61571	7,1	78	34	8
61572	7,2	78	34	8
61573	7,3	78	34	8
61574	7,4	78	34	8
61575	7,5	78	34	8
61576	7,6	81	37	8
61577	7,7	81	37	8
61578	7,8	81	37	8
61579	7,9	81	37	8
61580	8	81	37	8
61581	8,1	87	37	10
61582	8,2	87	37	10
61583	8,3	87	37	10
61584	8,4	87	37	10
61585	8,5	87	37	10
61586	8,6	90	40	10
61587	8,7	90	40	10
61588	8,8	90	40	10
61589	8,9	90	40	10
61590	9	90	40	10
61591	9,1	90	40	10
61592	9,2	90	40	10
61593	9,3	90	40	10
61594	9,4	90	40	10


EDP	D	L	l	d
61595	9,5	90	40	10
61596	9,6	93	43	10
61597	9,7	93	43	10
61598	9,8	93	43	10
61599	9,9	93	43	10
61600	10	93	43	10
61601	10,1	100	43	12
61602	10,2	100	43	12
61603	10,3	100	43	12
61604	10,4	100	43	12
61605	10,5	100	43	12
61606	10,6	100	43	12
61607	10,7	104	47	12
61608	10,8	104	47	12
61609	10,9	104	47	12
61610	11	104	47	12
61611	11,1	104	47	12
61612	11,2	104	47	12
61613	11,3	104	47	12
61614	11,4	104	47	12
61615	11,5	104	47	12
61616	11,6	104	47	12
61617	11,7	104	47	12
61618	11,8	104	47	12
61619	11,9	108	51	12
61620	12	108	51	12
43011210	12,1	108	51	16
43011220	12,2	108	51	16
43011230	12,3	108	51	16
43011240	12,4	108	51	16
43011250	12,5	108	51	16
43011260	12,6	108	51	16
43011270	12,7	108	51	16
43011280	12,8	108	51	16
43011290	12,9	108	51	16
43011300	13	108	51	16
43011350	13,5	114	54	16
43011400	14	114	54	16
43011450	14,5	116	56	16
43011500	15	116	56	16
43011550	15,5	118	58	16
43011600	16	118	58	16
43011650	16,5	126	60	20
43011700	17	126	60	20
43011750	17,5	128	62	20





# EX-SUS-GDR

Drilling | HSS | 5xD



- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 5xD
- For stainless steel, low carbon steel and cast aluminium
- 485 sizes - from Ø 2-6 mm in 0,01 mm increments



Drilling | HSS

5xD


EDP	D	L	l	d
62520	2	56	24	3
8597201	2,01	56	24	3
8597202	2,02	56	24	3
8597203	2,03	56	24	3
8597204	2,04	56	24	3
8597205	2,05	56	24	3
8597206	2,06	56	24	3
8597207	2,07	56	24	3
8597208	2,08	56	24	3
8597209	2,09	56	24	3
62521	2,1	56	24	3
8597211	2,11	56	24	3
8597212	2,12	56	24	3
8597213	2,13	59	27	3
8597214	2,14	59	27	3
8597215	2,15	59	27	3
8597216	2,16	59	27	3
8597217	2,17	59	27	3
8597218	2,18	59	27	3
8597219	2,19	59	27	3
62522	2,2	59	27	3
8597221	2,21	59	27	3
8597222	2,22	59	27	3
8597223	2,23	59	27	3
8597224	2,24	59	27	3
8597225	2,25	59	27	3
8597226	2,26	59	27	3
8597227	2,27	59	27	3
8597228	2,28	59	27	3
8597229	2,29	59	27	3
62523	2,3	59	27	3
8597231	2,31	59	27	3
8597232	2,32	59	27	3
8597233	2,33	59	27	3
8597234	2,34	59	27	3
8597235	2,35	59	27	3
8597236	2,36	59	27	3
8597237	2,37	62	30	3
8597238	2,38	62	30	3
8597239	2,39	62	30	3
62524	2,4	62	30	3
8597241	2,41	62	30	3
8597242	2,42	62	30	3
8597243	2,43	62	30	3
8597244	2,44	62	30	3

EDP	D	L	l	d
8597245	2,45	62	30	3
8597246	2,46	62	30	3
8597247	2,47	62	30	3
8597248	2,48	62	30	3
8597249	2,49	62	30	3
62525	2,5	62	30	3
8597251	2,51	62	30	3
8597252	2,52	62	30	3
8597253	2,53	62	30	3
8597254	2,54	62	30	3
8597255	2,55	62	30	3
8597256	2,56	62	30	3
8597257	2,57	62	30	3
8597258	2,58	62	30	3
8597259	2,59	62	30	3
62526	2,6	62	30	3
8597261	2,61	62	30	3
8597262	2,62	62	30	3
8597263	2,63	62	30	3
8597264	2,64	62	30	3
8597265	2,65	62	30	3
8597266	2,66	65	33	3
8597267	2,67	65	33	3
8597268	2,68	65	33	3
8597269	2,69	65	33	3
62527	2,7	65	33	3
8597271	2,71	65	33	3
8597272	2,72	65	33	3
8597273	2,73	65	33	3
8597274	2,74	65	33	3
8597275	2,75	65	33	3
8597276	2,76	65	33	3
8597277	2,77	65	33	3
8597278	2,78	65	33	3
8597279	2,79	65	33	3
62528	2,8	65	33	3
8597281	2,81	65	33	3
8597282	2,82	65	33	3
8597283	2,83	65	33	3
8597284	2,84	65	33	3
8597285	2,85	65	33	3
8597286	2,86	65	33	3
8597287	2,87	65	33	3
8597288	2,88	65	33	3
8597289	2,89	65	33	3



# EX-SUS-GDR

Drilling | HSS | 5xD



- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 5xD
- For stainless steel, low carbon steel and cast aluminium
- 485 sizes - from Ø 2-6 mm in 0,01 mm increments



EDP	D	L	l	d
62529	2,9	65	33	3
8597291	2,91	65	33	3
8597292	2,92	65	33	3
8597293	2,93	65	33	3
8597294	2,94	65	33	3
8597295	2,95	65	33	3
8597296	2,96	65	33	3
8597297	2,97	65	33	3
8597298	2,98	65	33	3
8597299	2,99	65	33	3
62530	3	65	33	3
8597301	3,01	68	36	4
8597302	3,02	68	36	4
8597303	3,03	68	36	4
8597304	3,04	68	36	4
8597305	3,05	68	36	4
8597306	3,06	68	36	4
8597307	3,07	68	36	4
8597308	3,08	68	36	4
8597309	3,09	68	36	4
62531	3,1	68	36	4
8597311	3,11	68	36	4
8597312	3,12	68	36	4
8597313	3,13	68	36	4
8597314	3,14	68	36	4
8597315	3,15	68	36	4
8597316	3,16	68	36	4
8597317	3,17	68	36	4
8597318	3,18	68	36	4
8597319	3,19	68	36	4
62532	3,2	68	36	4
8597321	3,21	68	36	4
8597322	3,22	68	36	4
8597323	3,23	68	36	4
8597324	3,24	68	36	4
8597325	3,25	68	36	4
8597326	3,26	68	36	4
8597327	3,27	68	36	4
8597328	3,28	68	36	4
8597329	3,29	68	36	4
62533	3,3	68	36	4
8597331	3,31	68	36	4
8597332	3,32	68	36	4
8597333	3,33	68	36	4
8597334	3,34	68	36	4

EDP	D	L	l	d
8597335	3,35	68	36	4
8597336	3,36	71	39	4
8597337	3,37	71	39	4
8597338	3,38	71	39	4
8597339	3,39	71	39	4
62534	3,4	71	39	4
8597341	3,41	71	39	4
8597342	3,42	71	39	4
8597343	3,43	71	39	4
8597344	3,44	71	39	4
8597345	3,45	71	39	4
8597346	3,46	71	39	4
8597347	3,47	71	39	4
8597348	3,48	71	39	4
8597349	3,49	71	39	4
62535	3,5	71	39	4
8597351	3,51	71	39	4
8597352	3,52	71	39	4
8597353	3,53	71	39	4
8597354	3,54	71	39	4
8597355	3,55	71	39	4
8597356	3,56	71	39	4
8597357	3,57	71	39	4
8597358	3,58	71	39	4
8597359	3,59	71	39	4
62536	3,6	71	39	4
8597361	3,61	71	39	4
8597362	3,62	71	39	4
8597363	3,63	71	39	4
8597364	3,64	71	39	4
8597365	3,65	71	39	4
8597366	3,66	71	39	4
8597367	3,67	71	39	4
8597368	3,68	71	39	4
8597369	3,69	71	39	4
62537	3,7	71	39	4
8597371	3,71	71	39	4
8597372	3,72	71	39	4
8597373	3,73	71	39	4
8597374	3,74	71	39	4
8597375	3,75	71	39	4
8597376	3,76	75	43	4
8597377	3,77	75	43	4
8597378	3,78	75	43	4
8597379	3,79	75	43	4

Drilling | HSS  
5xD



01245 260414 - 250910




sales@smarttoolsuk.com



www.smarttoolsuk.com

# EX-SUS-GDR

Drilling | HSS | 5xD



- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 5xD
- For stainless steel, low carbon steel and cast aluminium
- 485 sizes - from Ø 2-6 mm in 0,01 mm increments



Drilling | HSS

5xD

EDP	D	L	l	d
62538	3,8	75	43	4
8597381	3,81	75	43	4
8597382	3,82	75	43	4
8597383	3,83	75	43	4
8597384	3,84	75	43	4
8597385	3,85	75	43	4
8597386	3,86	75	43	4
8597387	3,87	75	43	4
8597388	3,88	75	43	4
8597389	3,89	75	43	4
62539	3,9	75	43	4
8597391	3,91	75	43	4
8597392	3,92	75	43	4
8597393	3,93	75	43	4
8597394	3,94	75	43	4
8597395	3,95	75	43	4
8597396	3,96	75	43	4
8597397	3,97	75	43	4
8597398	3,98	75	43	4
8597399	3,99	75	43	4
62540	4	75	43	4
8597401	4,01	87	43	6
8597402	4,02	87	43	6
8597403	4,03	87	43	6
8597404	4,04	87	43	6
8597405	4,05	87	43	6
8597406	4,06	87	43	6
8597407	4,07	87	43	6
8597408	4,08	87	43	6
8597409	4,09	87	43	6
62541	4,1	87	43	6
8597411	4,11	87	43	6
8597412	4,12	87	43	6
8597413	4,13	87	43	6
8597414	4,14	87	43	6
8597415	4,15	87	43	6
8597416	4,16	87	43	6
8597417	4,17	87	43	6
8597418	4,18	87	43	6
8597419	4,19	87	43	6
62542	4,2	87	43	6
8597421	4,21	87	43	6
8597422	4,22	87	43	6
8597423	4,23	87	43	6
8597424	4,24	87	43	6


EDP	D	L	l	d
8597425	4,25	87	43	6
8597426	4,26	91	47	6
8597427	4,27	91	47	6
8597428	4,28	91	47	6
8597429	4,29	91	47	6
62543	4,3	91	47	6
8597431	4,31	91	47	6
8597432	4,32	91	47	6
8597433	4,33	91	47	6
8597434	4,34	91	47	6
8597435	4,35	91	47	6
8597436	4,36	91	47	6
8597437	4,37	91	47	6
8597438	4,38	91	47	6
8597439	4,39	91	47	6
62544	4,4	91	47	6
8597441	4,41	91	47	6
8597442	4,42	91	47	6
8597443	4,43	91	47	6
8597444	4,44	91	47	6
8597445	4,45	91	47	6
8597446	4,46	91	47	6
8597447	4,47	91	47	6
8597448	4,48	91	47	6
8597449	4,49	91	47	6
62545	4,5	91	47	6
8597451	4,51	91	47	6
8597452	4,52	91	47	6
8597453	4,53	91	47	6
8597454	4,54	91	47	6
8597455	4,55	91	47	6
8597456	4,56	91	47	6
8597457	4,57	91	47	6
8597458	4,58	91	47	6
8597459	4,59	91	47	6
62546	4,6	91	47	6
8597461	4,61	91	47	6
8597462	4,62	91	47	6
8597463	4,63	91	47	6
8597464	4,64	91	47	6
8597465	4,65	91	47	6
8597466	4,66	91	47	6
8597467	4,67	91	47	6
8597468	4,68	91	47	6
8597469	4,69	91	47	6





# EX-SUS-GDR

Drilling | HSS | 5xD



- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 5xD
- For stainless steel, low carbon steel and cast aluminium
- 485 sizes - from Ø 2-6 mm in 0,01 mm increments

<b>P</b> C: ≤0,2%	<b>P</b> C: 0,25-0,4%	<b>M</b> INOX	<b>N</b> Al	<b>N</b> AC,ADC
-------------------	-----------------------	---------------	-------------	-----------------

<b>HSSE</b>	<b>TiN</b>	<b>35°~40°</b>	<b>h7</b>	<b>D≤12</b>	<b>D&gt;12</b>	<b>2≤D≤4 130°</b>	<b>D&gt;4 120°</b>	<b>h8</b>	<b>p.26</b>
-------------	------------	----------------	-----------	-------------	----------------	-----------------------	------------------------	-----------	-------------

EDP	D	L	l	d
62547	4,7	91	47	6
8597471	4,71	91	47	6
8597472	4,72	91	47	6
8597473	4,73	91	47	6
8597474	4,74	91	47	6
8597475	4,75	91	47	6
8597476	4,76	96	52	6
8597477	4,77	96	52	6
8597478	4,78	96	52	6
8597479	4,79	96	52	6
62548	4,8	96	52	6
8597481	4,81	96	52	6
8597482	4,82	96	52	6
8597483	4,83	96	52	6
8597484	4,84	96	52	6
8597485	4,85	96	52	6
8597486	4,86	96	52	6
8597487	4,87	96	52	6
8597488	4,88	96	52	6
8597489	4,89	96	52	6
62549	4,9	96	52	6
8597491	4,91	96	52	6
8597492	4,92	96	52	6
8597493	4,93	96	52	6
8597494	4,94	96	52	6
8597495	4,95	96	52	6
8597496	4,96	96	52	6
8597497	4,97	96	52	6
8597498	4,98	96	52	6
8597499	4,99	96	52	6
62550	5	96	52	6
8597501	5,01	96	52	6
8597502	5,02	96	52	6
8597503	5,03	96	52	6
8597504	5,04	96	52	6
8597505	5,05	96	52	6
8597506	5,06	96	52	6
8597507	5,07	96	52	6
8597508	5,08	96	52	6
8597509	5,09	96	52	6
62551	5,1	96	52	6
8597511	5,11	96	52	6
8597512	5,12	96	52	6
8597513	5,13	96	52	6
8597514	5,14	96	52	6

EDP	D	L	l	d
8597515	5,15	96	52	6
8597516	5,16	96	52	6
8597517	5,17	96	52	6
8597518	5,18	96	52	6
8597519	5,19	96	52	6
62552	5,2	96	52	6
8597521	5,21	96	52	6
8597522	5,22	96	52	6
8597523	5,23	96	52	6
8597524	5,24	96	52	6
8597525	5,25	96	52	6
8597526	5,26	96	52	6
8597527	5,27	96	52	6
8597528	5,28	96	52	6
8597529	5,29	96	52	6
62553	5,3	96	52	6
8597531	5,31	101	57	6
8597532	5,32	101	57	6
8597533	5,33	101	57	6
8597534	5,34	101	57	6
8597535	5,35	101	57	6
8597536	5,36	101	57	6
8597537	5,37	101	57	6
8597538	5,38	101	57	6
8597539	5,39	101	57	6
62554	5,4	101	57	6
8597541	5,41	101	57	6
8597542	5,42	101	57	6
8597543	5,43	101	57	6
8597544	5,44	101	57	6
8597545	5,45	101	57	6
8597546	5,46	101	57	6
8597547	5,47	101	57	6
8597548	5,48	101	57	6
8597549	5,49	101	57	6
62555	5,5	101	57	6
8597551	5,51	101	57	6
8597552	5,52	101	57	6
8597553	5,53	101	57	6
8597554	5,54	101	57	6
8597555	5,55	101	57	6
8597556	5,56	101	57	6
8597557	5,57	101	57	6
8597558	5,58	101	57	6
8597559	5,59	101	57	6

Drilling | HSS  
5xD



01245 260414 - 250910




sales@smarttoolsuk.com



www.smarttoolsuk.com

# EX-SUS-GDR

Drilling | HSS | 5xD



- First choice in quality and performance
- HSSE drill with TiN coating
- Up to 5xD
- For stainless steel, low carbon steel and cast aluminium
- 485 sizes - from Ø 2-6 mm in 0,01 mm increments



Drilling | HSS

5xD


EDP	D	L	l	d
62556	5,6	101	57	6
8597561	5,61	101	57	6
8597562	5,62	101	57	6
8597563	5,63	101	57	6
8597564	5,64	101	57	6
8597565	5,65	101	57	6
8597566	5,66	101	57	6
8597567	5,67	101	57	6
8597568	5,68	101	57	6
8597569	5,69	101	57	6
62557	5,7	101	57	6
8597571	5,71	101	57	6
8597572	5,72	101	57	6
8597573	5,73	101	57	6
8597574	5,74	101	57	6
8597575	5,75	101	57	6
8597576	5,76	101	57	6
8597577	5,77	101	57	6
8597578	5,78	101	57	6
8597579	5,79	101	57	6
62558	5,8	101	57	6
8597581	5,81	101	57	6
8597582	5,82	101	57	6
8597583	5,83	101	57	6
8597584	5,84	101	57	6
8597585	5,85	101	57	6
8597586	5,86	101	57	6
8597587	5,87	101	57	6
8597588	5,88	101	57	6
8597589	5,89	101	57	6
62559	5,9	101	57	6
8597591	5,91	101	57	6
8597592	5,92	101	57	6
8597593	5,93	101	57	6
8597594	5,94	101	57	6
8597595	5,95	101	57	6
8597596	5,96	101	57	6
8597597	5,97	101	57	6
8597598	5,98	101	57	6
8597599	5,99	101	57	6
62560	6	101	57	6
62561	6,1	107	63	8
62562	6,2	107	63	8
62563	6,3	107	63	8
62564	6,4	107	63	8

EDP	D	L	l	d
62565	6,5	107	63	8
62566	6,6	107	63	8
62567	6,7	107	63	8
62568	6,8	113	69	8
62569	6,9	113	69	8
62570	7	113	69	8
62571	7,1	113	69	8
62572	7,2	113	69	8
62573	7,3	113	69	8
62574	7,4	113	69	8
62575	7,5	113	69	8
62576	7,6	119	75	8
62577	7,7	119	75	8
62578	7,8	119	75	8
62579	7,9	119	75	8
62580	8	119	75	8
62581	8,1	125	75	10
62582	8,2	125	75	10
62583	8,3	125	75	10
62584	8,4	125	75	10
62585	8,5	125	75	10
62586	8,6	131	81	10
62587	8,7	131	81	10
62588	8,8	131	81	10
62589	8,9	131	81	10
62590	9	131	81	10
62591	9,1	131	81	10
62592	9,2	131	81	10
62593	9,3	131	81	10
62594	9,4	131	81	10
62595	9,5	131	81	10
62596	9,6	137	87	10
62597	9,7	137	87	10
62598	9,8	137	87	10
62599	9,9	137	87	10
62600	10	137	87	10
62601	10,1	144	87	12
62602	10,2	144	87	12
62603	10,3	144	87	12
62604	10,4	144	87	12
62605	10,5	144	87	12
62606	10,6	144	87	12
62607	10,7	151	94	12
62608	10,8	151	94	12
62609	10,9	151	94	12





# KEY FEATURES: EX-SERIES

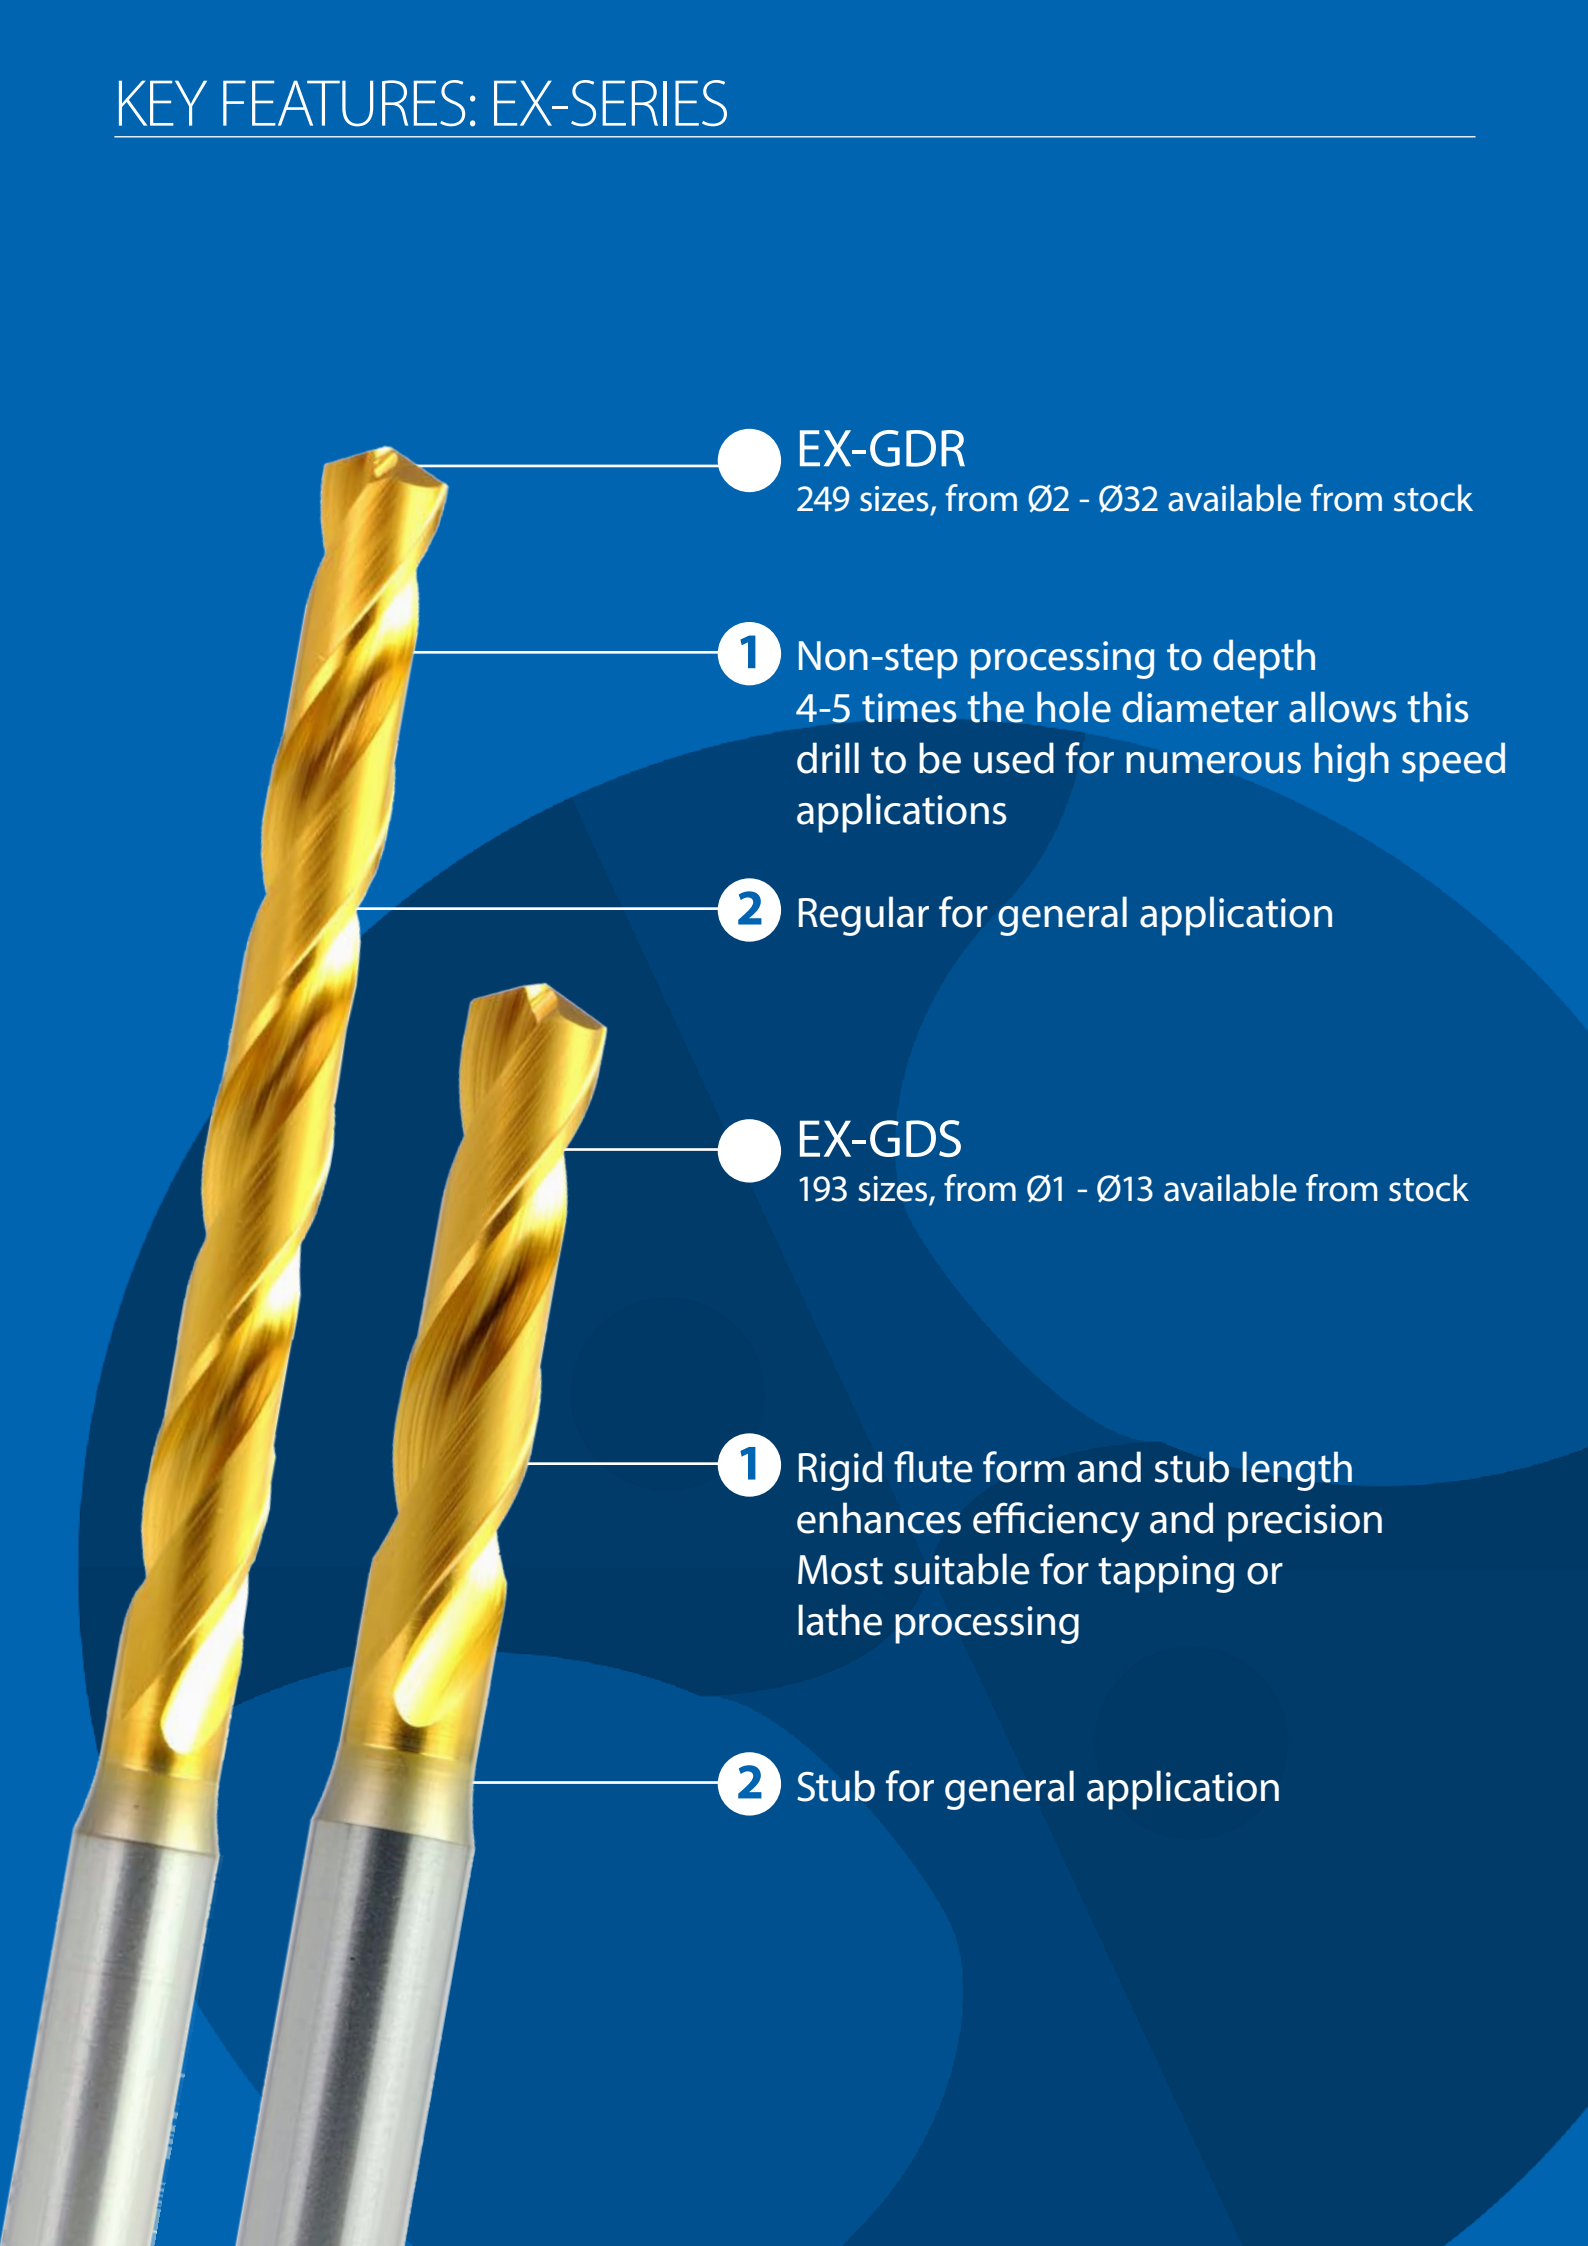

● EX-GDR  
249 sizes, from Ø2 - Ø32 available from stock

1 Non-step processing to depth  
4-5 times the hole diameter allows this  
drill to be used for numerous high speed  
applications

2 Regular for general application

● EX-GDS  
193 sizes, from Ø1 - Ø13 available from stock

1 Rigid flute form and stub length  
enhances efficiency and precision  
Most suitable for tapping or  
lathe processing

2 Stub for general application

# RECOMMENDED WORK MATERIALS

The EX-GDS & EX-GDR drill line is famous worldwide for its incredible performance in nearly all material families. From cast iron and hardened alloy steel to manual machines or CNC controls, this drill has the toughness and durability to perform. Available in stub and jobber lengths in a complete stocked size offering.

- No center drills needed. Achieves high accuracy while reducing drill thrust force for longer tool life
- Added hardness versus ordinary HSS, yet exceptional toughness provides exceptional versatility in any application.
- Increased hardness and lubricity increases wear resistance thereby extending tool life.

## Applications

- Cast Aluminum, Cast Iron, Carbon Steel, Alloy Steel, Die Steel, Hardened Steel < 45 HRC.
- Proven cost-effective in any application, from small run jobs to large scale production runs.
- Easily reground and recoated by OSG's local Regrind Service.

	EX-SUS-GDS/GDR 	EX-GDS 	EX-GDR 
Low carbon steel	⊙	○	○
Medium carbon steel	○	⊙	⊙
High carbon steel		⊙	⊙
Alloys steels		⊙	⊙
~35 HRC		⊙	○
35~45 HRC		⊙ / ○*	
45~50 HRC			
50~70 HRC			
Stainless	⊙		
Tool steel		⊙ / ○*	⊙
Cast iron		⊙	⊙
Ductile cast iron		○	○
Copper	⊙		
Aluminium	⊙		○
Alu alloy casting	○	○	○
Titanium alloy			
Inconel		○	
Magnesium alloy		○	○


⊙ Recommended ○ Good \* Drilling depth 3D~4D





# EX-GDS

Drilling | HSS | 3xD

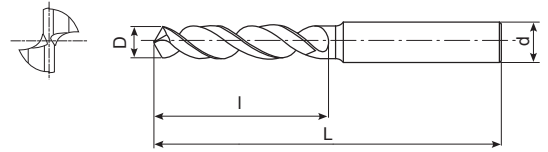

- HSSE drill with TiN coating
- Up to 3xD
- General purpose
- 193 sizes

<b>P</b> ○ C: ≤0,2%	<b>P</b> ● C: 0,25-0,4%	<b>P</b> ● C: ≥0,45%	<b>P</b> ● SCM	<b>K</b> ● GG	<b>K</b> ○ GGG	<b>N</b> ○ AC,ADC	<b>S</b> ○ Ni	<b>H</b> ● 25-35 HRC	<b>H</b> ● 35-45 HRC
------------------------	----------------------------	-------------------------	-------------------	------------------	-------------------	----------------------	------------------	-------------------------	-------------------------

HSS-Co	TiN	25°	h7	h8
--------	-----	-----	----	----



Drilling | HSS

3xD


EDP	D	L	l	d
60010	1	38	6	3
60410	1,05	38	6	3
60011	1,1	39	7	3
60411	1,15	39	7	3
60012	1,2	40	8	3
60412	1,25	40	8	3
60013	1,3	40	8	3
60413	1,35	41	9	3
60014	1,4	41	9	3
60414	1,45	41	9	3
60015	1,5	41	9	3
60415	1,55	42	10	3
60016	1,6	42	10	3
60416	1,65	42	10	3
60017	1,7	42	10	3
60417	1,75	43	11	3
60018	1,8	43	11	3
60418	1,85	43	11	3
60019	1,9	43	11	3
60419	1,95	44	12	3
60020	2	44	12	3
60420	2,05	44	12	3
60021	2,1	44	12	3
60421	2,15	45	13	3
60022	2,2	45	13	3
60422	2,25	45	13	3
60023	2,3	45	13	3
60423	2,35	45	13	3
60024	2,4	46	14	3
60424	2,45	46	14	3
60025	2,5	46	14	3
60425	2,55	46	14	3
60026	2,6	46	14	3
60426	2,65	46	14	3
60027	2,7	48	16	3
60427	2,75	48	16	3
60028	2,8	48	16	3
60428	2,85	48	16	3
60029	2,9	48	16	3
60429	2,95	48	16	3
60030	3	48	16	3
60430	3,05	50	18	4
60031	3,1	50	18	4
60431	3,15	50	18	4
60032	3,2	50	18	4

EDP	D	L	l	d
60432	3,25	50	18	4
60033	3,3	50	18	4
60433	3,35	50	18	4
60034	3,4	52	20	4
60434	3,45	52	20	4
60035	3,5	52	20	4
60435	3,55	52	20	4
60036	3,6	52	20	4
60436	3,65	52	20	4
60037	3,7	52	20	4
60437	3,75	52	20	4
60038	3,8	54	22	4
60438	3,85	54	22	4
60039	3,9	54	22	4
60439	3,95	54	22	4
60040	4	54	22	4
60440	4,05	66	22	6
60041	4,1	66	22	6
60441	4,15	66	22	6
60042	4,2	66	22	6
60442	4,25	66	22	6
60043	4,3	68	24	6
60443	4,35	68	24	6
60044	4,4	68	24	6
60444	4,45	68	24	6
60045	4,5	68	24	6
60445	4,55	68	24	6
60046	4,6	68	24	6
60446	4,65	68	24	6
60047	4,7	68	24	6
60447	4,75	68	24	6
60048	4,8	70	26	6
60448	4,85	70	26	6
60049	4,9	70	26	6
60449	4,95	70	26	6
60050	5	70	26	6
60450	5,05	70	26	6
60051	5,1	70	26	6
60451	5,15	70	26	6
60052	5,2	70	26	6
60452	5,25	70	26	6
60053	5,3	70	26	6
60453	5,35	72	28	6
60054	5,4	72	28	6
60454	5,45	72	28	6



# EX-GDS

Drilling | HSS | 3xD

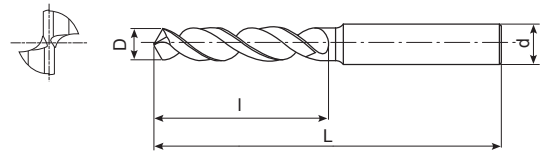

- HSSE drill with TiN coating
- Up to 3xD
- General purpose
- 193 sizes

<b>P</b> ○ C: ≤0,2%	<b>P</b> ● C: 0,25-0,4%	<b>P</b> ● C: ≥0,45%	<b>P</b> ● SCM	<b>K</b> ● GG	<b>K</b> ○ GGG	<b>N</b> ○ AC,ADC	<b>S</b> ○ Ni	<b>H</b> ● 25-35 HRC	<b>H</b> ● 35-45 HRC
------------------------	----------------------------	-------------------------	-------------------	------------------	-------------------	----------------------	------------------	-------------------------	-------------------------

HSS-Co	TiN	25°	h7	h8
--------	-----	-----	----	----

p.27
------

EDP	D	L	l	d
60055	5,5	72	28	6
60455	5,55	72	28	6
60056	5,6	72	28	6
60456	5,65	72	28	6
60057	5,7	72	28	6
60457	5,75	72	28	6
60058	5,8	72	28	6
60458	5,85	72	28	6
60059	5,9	72	28	6
60459	5,95	72	28	6
60060	6	72	28	6
60061	6,1	75	31	8
60062	6,2	75	31	8
60063	6,3	75	31	8
60064	6,4	75	31	8
60065	6,5	75	31	8
60465	6,55	75	31	8
60066	6,6	75	31	8
60466	6,65	75	31	8
60067	6,7	75	31	8
60068	6,8	78	34	8
60069	6,9	78	34	8
60070	7	78	34	8
60071	7,1	78	34	8
60072	7,2	78	34	8
60073	7,3	78	34	8
60473	7,35	78	34	8
60074	7,4	78	34	8
60075	7,5	78	34	8
60475	7,55	81	37	8
60076	7,6	81	37	8
60476	7,65	81	37	8
60077	7,7	81	37	8
60078	7,8	81	37	8
60079	7,9	81	37	8
60080	8	81	37	8
60081	8,1	87	37	10
60082	8,2	87	37	10
60083	8,3	87	37	10
60483	8,35	87	37	10
60084	8,4	87	37	10
60085	8,5	87	37	10
60485	8,55	90	40	10
60086	8,6	90	40	10
60486	8,65	90	40	10

EDP	D	L	l	d
60087	8,7	90	40	10
60088	8,8	90	40	10
60089	8,9	90	40	10
60090	9	90	40	10
60091	9,1	90	40	10
60092	9,2	90	40	10
60492	9,25	90	40	10
60093	9,3	90	40	10
60493	9,35	90	40	10
60094	9,4	90	40	10
60494	9,45	90	40	10
60095	9,5	90	40	10
60495	9,55	93	43	10
60096	9,6	93	43	10
60496	9,65	93	43	10
60097	9,7	93	43	10
60098	9,8	93	43	10
60099	9,9	93	43	10
60499	9,95	93	43	10
60100	10	93	43	10
60101	10,1	100	43	12
60102	10,2	100	43	12
62002	10,25	100	43	12
60103	10,3	100	43	12
62003	10,35	100	43	12
60104	10,4	100	43	12
60105	10,5	100	43	12
62005	10,55	100	43	12
60106	10,6	100	43	12
62006	10,65	104	47	12
60107	10,7	104	47	12
60108	10,8	104	47	12
60109	10,9	104	47	12
62009	10,95	104	47	12
60110	11	104	47	12
60111	11,1	104	47	12
60112	11,2	104	47	12
62012	11,25	104	47	12
60113	11,3	104	47	12
62013	11,35	104	47	12
60114	11,4	104	47	12
60115	11,5	104	47	12
62015	11,55	104	47	12
60116	11,6	104	47	12
60117	11,7	104	47	12

Drilling | HSS  
3xD



01245 260414 - 250910



sales@smarttoolsuk.com




www.smarttoolsuk.com



# EX-GDR

Drilling | HSS | 5xD



- HSSE drill with TiN coating
- Up to 5xD
- General purpose
- 249 sizes



EDP	D	L	l	d
60520	2	56	24	3
62120	2,05	56	24	3
60521	2,1	56	24	3
62121	2,15	59	27	3
60522	2,2	59	27	3
62122	2,25	59	27	3
60523	2,3	59	27	3
62123	2,35	59	27	3
60524	2,4	62	30	3
62124	2,45	62	30	3
60525	2,5	62	30	3
62125	2,55	62	30	3
60526	2,6	62	30	3
62126	2,65	62	30	3
60527	2,7	65	33	3
62127	2,75	65	33	3
60528	2,8	65	33	3
62128	2,85	65	33	3
60529	2,9	65	33	3
62129	2,95	65	33	3
60530	3	65	33	3
62130	3,05	68	36	4
60531	3,1	68	36	4
62131	3,15	68	36	4
60532	3,2	68	36	4
62132	3,25	68	36	4
60533	3,3	68	36	4
62133	3,35	68	36	4
60534	3,4	71	39	4
62134	3,45	71	39	4
60535	3,5	71	39	4
62135	3,55	71	39	4
60536	3,6	71	39	4
62136	3,65	71	39	4
60537	3,7	71	39	4
62137	3,75	71	39	4
60538	3,8	75	43	4
62138	3,85	75	43	4
60539	3,9	75	43	4
62139	3,95	75	43	4
60540	4	75	43	4
62140	4,05	87	43	6
60541	4,1	87	43	6
62141	4,15	87	43	6
60542	4,2	87	43	6

EDP	D	L	l	d
62142	4,25	87	43	6
60543	4,3	91	47	6
62143	4,35	91	47	6
60544	4,4	91	47	6
62144	4,45	91	47	6
60545	4,5	91	47	6
62145	4,55	91	47	6
60546	4,6	91	47	6
62146	4,65	91	47	6
60547	4,7	91	47	6
62147	4,75	91	47	6
60548	4,8	96	52	6
62148	4,85	96	52	6
60549	4,9	96	52	6
62149	4,95	96	52	6
60550	5	96	52	6
62150	5,05	96	52	6
60551	5,1	96	52	6
62151	5,15	96	52	6
60552	5,2	96	52	6
62152	5,25	96	52	6
60553	5,3	96	52	6
62153	5,35	101	57	6
60554	5,4	101	57	6
62154	5,45	101	57	6
60555	5,5	101	57	6
62155	5,55	101	57	6
60556	5,6	101	57	6
62156	5,65	101	57	6
60557	5,7	101	57	6
62157	5,75	101	57	6
60558	5,8	101	57	6
62158	5,85	101	57	6
60559	5,9	101	57	6
62159	5,95	101	57	6
60560	6	101	57	6
62160	6,05	107	63	8
60561	6,1	107	63	8
62161	6,15	107	63	8
60562	6,2	107	63	8
62162	6,25	107	63	8
60563	6,3	107	63	8
62163	6,35	107	63	8
60564	6,4	107	63	8
62164	6,45	107	63	8

Drilling | HSS  
5xD



01245 260414 - 250910




sales@smarttoolsuk.com



www.smarttoolsuk.com

# EX-GDR

Drilling | HSS | 5xD



- HSSE drill with TiN coating
- Up to 5xD
- General purpose
- 249 sizes



Drilling | HSS

5xD


EDP	D	L	l	d
60565	6,5	107	63	8
62165	6,55	107	63	8
60566	6,6	107	63	8
62166	6,65	107	63	8
60567	6,7	107	63	8
62167	6,75	113	69	8
60568	6,8	113	69	8
62168	6,85	113	69	8
60569	6,9	113	69	8
62169	6,95	113	69	8
60570	7	113	69	8
62170	7,05	113	69	8
60571	7,1	113	69	8
62171	7,15	113	69	8
60572	7,2	113	69	8
62172	7,25	113	69	8
60573	7,3	113	69	8
62173	7,35	113	69	8
60574	7,4	113	69	8
62174	7,45	113	69	8
60575	7,5	113	69	8
62175	7,55	119	75	8
60576	7,6	119	75	8
62176	7,65	119	75	8
60577	7,7	119	75	8
62177	7,75	119	75	8
60578	7,8	119	75	8
62178	7,85	119	75	8
60579	7,9	119	75	8
62179	7,95	119	75	8
60580	8	119	75	8
62180	8,05	125	75	10
60581	8,1	125	75	10
62181	8,15	125	75	10
60582	8,2	125	75	10
62182	8,25	125	75	10
60583	8,3	125	75	10
62183	8,35	125	75	10
60584	8,4	125	75	10
62184	8,45	125	75	10
60585	8,5	125	75	10
62185	8,55	131	81	10
60586	8,6	131	81	10
62186	8,65	131	81	10
60587	8,7	131	81	10

EDP	D	L	l	d
62187	8,75	131	81	10
60588	8,8	131	81	10
62188	8,85	131	81	10
60589	8,9	131	81	10
62189	8,95	131	81	10
60590	9	131	81	10
62190	9,05	131	81	10
60591	9,1	131	81	10
62191	9,15	131	81	10
60592	9,2	131	81	10
62192	9,25	131	81	10
60593	9,3	131	81	10
62193	9,35	131	81	10
60594	9,4	131	81	10
62194	9,45	131	81	10
60595	9,5	131	81	10
62195	9,55	137	87	10
60596	9,6	137	87	10
62196	9,65	137	87	10
60597	9,7	137	87	10
62197	9,75	137	87	10
60598	9,8	137	87	10
62198	9,85	137	87	10
60599	9,9	137	87	10
62199	9,95	137	87	10
60600	10	137	87	10
62200	10,05	144	87	12
60601	10,1	144	87	12
62201	10,15	144	87	12
60602	10,2	144	87	12
62202	10,25	144	87	12
60603	10,3	144	87	12
62203	10,35	144	87	12
60604	10,4	144	87	12
62204	10,45	144	87	12
60605	10,5	144	87	12
62205	10,55	144	87	12
60606	10,6	144	87	12
62206	10,65	151	94	12
60607	10,7	151	94	12
62207	10,75	151	94	12
60608	10,8	151	94	12
62208	10,85	151	94	12
60609	10,9	151	94	12
62209	10,95	151	94	12



# EX-GDR

Drilling | HSS | 5xD



- HSSE drill with TiN coating
- Up to 5xD
- General purpose
- 249 sizes

<b>P</b> ○ C: ≤0,2%	<b>P</b> ● C: 0,25-0,4%	<b>P</b> ● C: ≥0,45%	<b>P</b> ● SCM	<b>K</b> ● GG	<b>K</b> ○ GGG	<b>N</b> ○ Al	<b>N</b> ○ AC,ADC	<b>H</b> ○ 25-35 HRC
------------------------	----------------------------	-------------------------	-------------------	------------------	-------------------	------------------	----------------------	-------------------------

HSS-Co	TiN	30°	h6 D>13	h7 D≤13	h8
--------	-----	-----	------------	------------	----



EDP	D	L	l	d
60610	11	151	94	12
62210	11,05	151	94	12
60611	11,1	151	94	12
62211	11,15	151	94	12
60612	11,2	151	94	12
62212	11,25	151	94	12
60613	11,3	151	94	12
62213	11,35	151	94	12
60614	11,4	151	94	12
62214	11,45	151	94	12
60615	11,5	151	94	12
62215	11,55	151	94	12
60616	11,6	151	94	12
62216	11,65	151	94	12
60617	11,7	151	94	12
62217	11,75	151	94	12
60618	11,8	151	94	12
62218	11,85	158	101	12
60619	11,9	158	101	12
62219	11,95	158	101	12
60620	12	158	101	12
60621	12,1	158	101	12
60622	12,2	158	101	12
60623	12,3	158	101	12
60624	12,4	158	101	12
60625	12,5	158	101	12
60626	12,6	158	101	12
60627	12,7	158	101	12
60628	12,8	158	101	12
60629	12,9	158	101	12
60630	13	158	101	12
60635	13,5	150	90	16
60640	14	150	90	16
60641	14,1	155	95	16
60645	14,5	155	95	16
60650	15	161	95	20
60655	15,5	166	100	20
60656	15,6	166	100	20
60660	16	166	100	20
60665	16,5	172	106	20
60670	17	172	106	20
60675	17,5	178	112	20
60676	17,6	178	112	20
60680	18	178	112	20
60685	18,5	184	118	20

EDP	D	L	l	d
60690	19	194	118	25
60695	19,5	201	125	25
60696	19,6	201	125	25
60700	20	201	125	25
60705	20,5	204	128	25
60710	21	204	128	25
60711	21,1	204	128	25
60715	21,5	208	132	25
60720	22	208	132	25
60725	22,5	212	136	25
60730	23	212	136	25
60735	23,5	212	136	25
60740	24	220	140	32
60745	24,5	220	140	32
60750	25	220	140	32
60755	25,5	225	145	32
60760	26	225	145	32
60765	26,5	225	145	32
60770	27	230	150	32
60780	28	230	150	32
60790	29	235	155	32
60800	30	235	155	32
60810	31	241	160	32
60820	32	245	165	32

Drilling | HSS  
5xD



01245 260414 - 250910



sales@smarttoolsuk.com



www.smarttoolsuk.com

# CUTTING CONDITIONS

Drilling | Solid | Cutting conditions

## EX-SUS-GDS/EX-SUS-GDR

Vc	SUS								Al		AC		Cu		C≤0,2%	
	Austenitic SUS304 SUS200		Martensitic SUS420 SUS440		Ferritic SUS430 SUS405		Precipitation SUS630 SUS631		A5052 - 7075		AC4C - ADC		C1020 - 2600		CK15 - St40 ~500 N/mm²	
∅	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
1	4.800	0,02~0,04	5.550	0,02~0,04	5.550	0,01~0,03	3.200	0,01~0,03	15.000	0,02~0,06	25.000	0,02~0,06	12.000	0,01~0,03	10.000	0,02~0,05
2	2.400	0,05~0,07	2.850	0,05~0,07	2.850	0,03~0,05	1.600	0,03~0,05	8.000	0,04~0,12	10.000	0,04~0,12	5.100	0,04~0,06	5.700	0,06~0,09
3	1.600	0,06~0,09	1.900	0,06~0,09	1.900	0,04~0,06	1.100	0,04~0,06	5.300	0,06~0,18	6.700	0,06~0,18	3.400	0,06~0,09	3.850	0,10~0,13
4	1.200	0,08~0,12	1.450	0,08~0,12	1.450	0,06~0,08	800	0,06~0,08	4.000	0,08~0,24	6.400	0,08~0,24	2.550	0,08~0,11	2.900	0,11~0,15
5	950	0,10~0,15	1.150	0,12~0,15	1.150	0,08~0,10	650	0,08~0,10	3.200	0,10~0,30	5.000	0,10~0,30	2.050	0,10~0,13	2.260	0,12~0,18
6	800	0,12~0,18	950	0,15~0,18	950	0,09~0,12	550	0,09~0,12	2.700	0,12~0,36	4.200	0,12~0,36	1.700	0,12~0,15	1.900	0,13~0,19
8	600	0,16~0,24	720	0,20~0,24	720	0,12~0,16	400	0,12~0,16	2.000	0,16~0,45	3.200	0,16~0,45	1.250	0,16~0,20	1.400	0,17~0,24
10	480	0,20~0,28	570	0,25~0,30	570	0,15~0,20	320	0,15~0,20	1.600	0,20~0,55	2.500	0,20~0,55	1.000	0,20~0,25	1.120	0,20~0,28
12	400	0,24~0,34	480	0,30~0,36	480	0,18~0,24	280	0,18~0,24	1.350	0,24~0,66	2.100	0,24~0,66	850	0,24~0,30	950	0,24~0,34
13	370	0,26~0,36	440	0,32~0,40	440	0,20~0,26	250	0,20~0,26	1.250	0,25~0,72	2.000	0,25~0,72	780	0,26~0,32	880	0,26~0,36
14	340	0,28~0,39	410	0,35~0,45	410	0,21~0,30	225	0,21~0,30	1.140	0,27~0,74	1.850	0,27~0,74	730	0,26~0,34	820	0,27~0,39
15	320	0,29~0,40	380	0,36~0,48	380	0,22~0,31	210	0,22~0,31	1.060	0,29~0,80	1.700	0,29~0,80	680	0,26~0,36	760	0,28~0,42
16	300	0,30~0,43	355	0,37~0,50	355	0,23~0,32	200	0,23~0,32	1.000	0,30~0,83	1.600	0,30~0,83	640	0,27~0,37	720	0,29~0,43
17	280	0,31~0,45	335	0,38~0,52	335	0,24~0,34	185	0,24~0,34	940	0,31~0,88	1.500	0,31~0,88	600	0,28~0,39	675	0,30~0,46
18	265	0,32~0,47	320	0,39~0,54	320	0,25~0,36	175	0,25~0,36	885	0,32~0,94	1.450	0,32~0,94	570	0,29~0,41	640	0,32~0,49
19	250	0,33~0,48	300	0,40~0,55	300	0,25~0,38	170	0,25~0,38	840	0,34~0,97	1.350	0,34~0,97	540	0,30~0,43	600	0,33~0,51
20	240	0,34~0,50	285	0,40~0,56	285	0,26~0,40	160	0,26~0,40	800	0,36~1,00	1.300	0,36~1,00	510	0,30~0,44	570	0,34~0,52





# CUTTING CONDITIONS

Drilling | Solid | Cutting conditions

## EX-GDS

Vc	1.05Low Carbon Steel-Mild steel S15C-SS400 ~500N/mm <sup>2</sup>		Carbon steel S50c 500~700N/mm <sup>2</sup>		Alloy steel SCM-SCr 710~900N/mm <sup>2</sup>		Special alloy steel-hardened steel			
							SKD61 ~900N/mm <sup>2</sup>		SKD11 900~1060N/mm <sup>2</sup>	
	32~40m/min		22~30m/min		20~25m/min		10~16m/min		8~12m/min	
Ø	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
1	11.500	0,03~0,05	8.000	0,03~0,05	7.000	0,03~0,05	4.000	0,03~0,05	3.200	0,03~0,05
2	5.700	0,06~0,09	4.000	0,06~0,09	3.500	0,06~0,09	2.000	0,06~0,09	1.600	0,06~0,09
3	3.800	0,1~0,13	2.800	0,1~0,13	2.400	0,1~0,13	1.350	0,1~0,13	1.060	0,1~0,13
4	2.900	0,11~0,15	2.100	0,11~0,15	1.800	0,11~0,15	1.000	0,11~0,15	800	0,11~0,15
5	2.300	0,12~0,18	1.650	0,12~0,18	1.400	0,12~0,18	800	0,12~0,18	640	0,12~0,18
6	1.900	0,13~0,19	1.400	0,13~0,19	1.200	0,13~0,19	660	0,13~0,19	530	0,13~0,19
7	1.650	0,15~0,22	1.200	0,15~0,22	1.050	0,15~0,22	570	0,15~0,22	450	0,15~0,22
8	1.400	0,17~0,24	1.050	0,17~0,24	920	0,17~0,24	500	0,16~0,24	400	0,17~0,24
9	1.250	0,18~0,26	920	0,18~0,26	810	0,18~0,26	440	0,18~0,26	350	0,18~0,26
10	1.150	0,20~0,28	830	0,20~0,28	730	0,20~0,28	400	0,20~0,28	230	0,20~0,28
11	1.050	0,22~0,32	750	0,22~0,32	670	0,22~0,32	360	0,22~0,31	300	0,22~0,32
12	950	0,24~0,34	690	0,24~0,34	610	0,24~0,34	330	0,24~0,34	270	0,24~0,34
13	880	0,26~0,36	640	0,26~0,36	560	0,26~0,36	300	0,26~0,36	250	0,26~0,36

Vc	Hardened steel				Inconel 718		Cast iron		Aluminium alloy casting	
	34~43HRC 1060~1400N/mm <sup>2</sup>		43~48HRC 1400~1600N/mm <sup>2</sup>		38~43HRC		FC250 ~350N/mm <sup>2</sup>		ADC-AC	
	10~15m/min		6~10m/min		6~8m/min		32~40m/min		63~100m/min	
Ø	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
1	3.800	0,01~0,03	2.500	0,01~0,02	2.500	0,01~0,02	10.000	0,04~0,06	20.000	0,06~0,09
2	1.900	0,02~0,05	1.250	0,02~0,04	1.250	0,02~0,04	5.700	0,08~0,11	10.000	0,12~0,18
3	1.250	0,03~0,08	850	0,03~0,06	850	0,03~0,06	3.800	0,11~0,16	10.000	0,18~0,26
4	960	0,04~0,1	640	0,04~0,08	630	0,04~0,08	2.900	0,13~0,19	7.500	0,24~0,34
5	760	0,05~0,13	510	0,05~0,10	500	0,05~0,10	2.300	0,16~0,22	6.300	0,28~0,40
6	640	0,06~0,15	430	0,06~0,12	430	0,06~0,12	1.900	0,19~0,26	5.000	0,34~0,48
7	550	0,07~0,18	360	0,07~0,14	360	0,07~0,14	1.650	0,20~0,28	4.450	0,36~0,50
8	480	0,08~0,20	320	0,08~0,16	320	0,08~0,16	1.450	0,21~0,31	4.000	0,38~0,53
9	430	0,09~0,23	280	0,09~0,18	280	0,09~0,18	1.270	0,23~0,33	3.450	0,41~0,58
10	380	0,10~0,25	260	0,10~0,20	260	0,10~0,20	1.150	0,25~0,35	3.150	0,45~0,63
11	350	0,11~0,28	230	0,11~0,22	230	0,11~0,22	1.050	0,27~0,38	2.850	0,48~0,69
12	320	0,12~0,30	210	0,12~0,24	210	0,12~0,24	960	0,30~0,42	2.650	0,53~0,75
13	300	0,13~0,32	200	0,13~0,26	200	0,13~0,26	880	0,31~0,42	2.400	0,56~0,79

## EX-GDR

Vc	1.05Low Carbon Steel-Mild steel S15C-SS400 ~500N/mm <sup>2</sup>		Carbon steel S50c 500~700N/mm <sup>2</sup>		Alloy steel SCM-SCr 710~900N/mm <sup>2</sup>		Special alloy steel-hardened steel				Cast iron		Aluminium alloy casting ADC-AC	
							SKD61 ~900N/mm <sup>2</sup>		SKD11 900~1060N/mm <sup>2</sup>		FC250 ~350N/mm <sup>2</sup>			
	32~40m/min		22~30m/min		20~25m/min		10~16m/min		8~12m/min		32~40m/min		63~100m/min	
Ø	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
2	5.700	0,06~0,09	4.000	0,06~0,09	3.500	0,06~0,09	1.900	0,06~0,09	1.600	0,06~0,09	5.700	0,08~0,11	10.000	0,12~0,18
3	3.850	0,1~0,13	2.800	0,1~0,13	2.400	0,1~0,13	1.320	0,1~0,13	1.060	0,1~0,13	3.850	0,11~0,16	10.000	0,20~0,28
4	2.900	0,11~0,15	2.100	0,11~0,15	1.800	0,11~0,15	950	0,11~0,15	800	0,11~0,15	2.900	0,13~0,19	7.500	0,24~0,34
5	2.260	0,12~0,18	1.600	0,12~0,18	1.400	0,12~0,18	750	0,12~0,18	630	0,12~0,18	2.260	0,16~0,22	6.300	0,28~0,40
6	1.900	0,13~0,19	1.320	0,13~0,19	1.180	0,13~0,19	630	0,13~0,19	530	0,13~0,19	1.900	0,19~0,26	5.000	0,34~0,48
8	1.400	0,17~0,24	1.000	0,17~0,24	900	0,17~0,24	480	0,17~0,24	400	0,17~0,24	1.400	0,21~0,30	4.000	0,38~0,53
10	1.120	0,20~0,28	800	0,20~0,28	710	0,20~0,28	380	0,20~0,28	320	0,20~0,28	1.120	0,25~0,35	3.150	0,45~0,63
12	950	0,24~0,34	670	0,24~0,34	600	0,24~0,34	320	0,24~0,34	270	0,24~0,34	950	0,30~0,42	2.650	0,53~0,75
13	880	0,26~0,36	610	0,26~0,36	540	0,26~0,36	290	0,26~0,36	240	0,26~0,36	880	0,31~0,42	2.400	0,56~0,79
14	820	0,28~0,39	570	0,28~0,39	500	0,28~0,39	270	0,28~0,39	230	0,28~0,39	820	0,32~0,44	2.250	0,57~0,81
16	720	0,30~0,43	500	0,30~0,43	440	0,30~0,43	240	0,30~0,43	200	0,30~0,43	720	0,34~0,46	1.950	0,61~0,85
18	640	0,34~0,49	440	0,34~0,49	390	0,34~0,49	210	0,34~0,49	180	0,34~0,49	640	0,36~0,50	1.750	0,63~0,90
20	570	0,36~0,50	400	0,36~0,50	350	0,36~0,50	190	0,36~0,50	160	0,36~0,50	570	0,40~0,56	1.550	0,68~0,98
22	520	0,40~0,55	360	0,40~0,55	320	0,40~0,55	170	0,40~0,55	150	0,40~0,55	520	0,42~0,59	1.400	0,73~1,06
24	480	0,41~0,60	330	0,41~0,60	290	0,41~0,60	160	0,41~0,60	135	0,41~0,60	480	0,46~0,65	1.300	0,77~1,13
26	440	0,42~0,65	310	0,42~0,65	270	0,42~0,65	150	0,42~0,65	120	0,42~0,65	440	0,47~0,68	1.200	0,81~1,20
28	410	0,45~0,70	290	0,45~0,70	250	0,45~0,70	140	0,45~0,70	110	0,45~0,70	410	0,50~0,73	1.100	0,84~1,26
30	380	0,48~0,75	270	0,48~0,75	230	0,48~0,75	130	0,48~0,75	105	0,48~0,75	380	0,54~0,78	1.000	0,87~1,32
32	360	0,51~0,80	250	0,51~0,80	220	0,51~0,80	120	0,51~0,80	100	0,51~0,80	360	0,58~0,83	950	0,9~1,38

Drilling | Solid

Cutting conditions





# SMART TOOLS UK

ADVANCED MANUFACTURING TECHNOLOGIES



01245 260414 - 250910



[sales@smarttoolsuk.com](mailto:sales@smarttoolsuk.com)



[www.smarttoolsuk.com](http://www.smarttoolsuk.com)